| WAAS CH 56627 W19A | APP CRS 187° | Rwy ldg 6502<br>TDZE 130<br>Apt Elev 130 |
|---|---|---|

# RNAV (GPS) RWY 19
## HARRELL FLD (CDH)

RNP APCH-GPS.

Rwy 19 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using El Dorado altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use El Dorado altimeter setting and LPV DA to 517 feet, LNAV/VNAV DA to 503 feet and all MDA 80 feet; increase LPV all Cats visibility ⅛ SM, and LNAV Cats C and D, and Circling Cat D ¼ SM.

MISSED APPROACH: Climb to 2700 direct URAME and hold.

| AWOS-3 | FORT WORTH CENTER | UNICOM |
|---|---|---|
| 125.2 | 128.2 269.1 | 122.7 (CTAF) L |

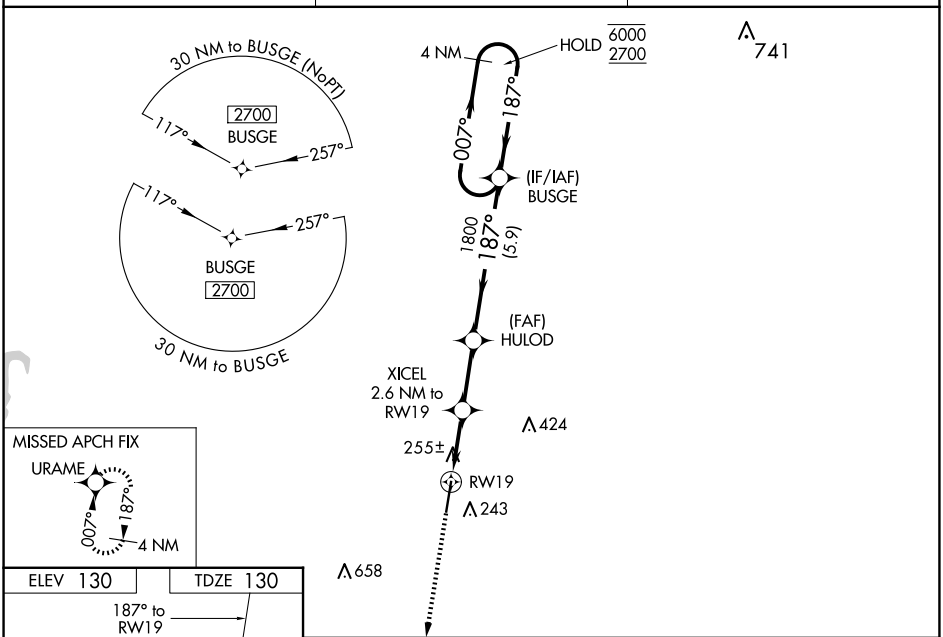


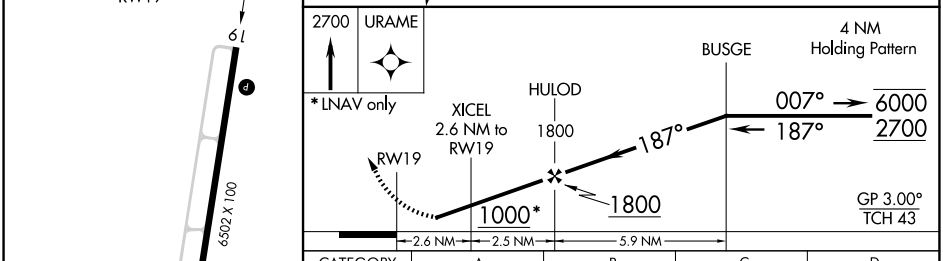


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 440-1 310 (400-1) | | | |
| LNAV/VNAV DA | 426-1 296 (300-1) | | | |
| LNAV MDA | 520-1 390 (400-1) | | 520-1⅛ 390 (400-1⅛) | |
| CIRCLING | 560-1 430 (500-1) | 580-1 450 (500-1) | 580-1½ 450 (500-1½) | 960-2¾ 830 (900-2¾) |

REIL Rwys 1 and 19 L
MIRL Rwy 1-19 L



SC-1, 20 MAR 2025 to 17 APR 2025
SC-1, 20 MAR 2025 to 17 APR 2025