

LOC I-BJC <b>111.7</b>	APP CRS <b>295°</b>	Rwy Idg 30R <b>9000</b> 30L <b>7002</b> TDZE <b>5599 5628</b> Apt Elev <b>5673 5673</b>
---------------------------	------------------------	---


# ILS or LOC RWY 30R

## ROCKY MOUNTAIN METRO (BJC)

**D**ME from BJC VOR/DME. Simultaneous reception of I-BJC and BJC DME required. DME or **NA** RADAR required. When local altimeter setting not received, use Denver Intl altimeter setting and increase all DA 82 feet and all MDA 100 feet. Increase S-ILS 30R all Cats visibility  $\frac{3}{8}$  mile. Increase S-LOC 30R Cats B/C/D visibility  $\frac{1}{4}$  mile. Increase Sidestep R30L Cats A/B visibility  $\frac{1}{4}$  mile, Cats C/D visibility  $\frac{1}{2}$  mile and Circling Cat C visibility  $\frac{1}{4}$  mile. For inoperative MALS/R, increase S-ILS 30R all Cats visibility  $\frac{1}{2}$  mile and increase S-LOC 30R Cat C/D visibility  $\frac{3}{8}$  mile. For inoperative MALS/R, when using Denver Intl altimeter setting, increase S-ILS 30R all Cats visibility to  $2\frac{1}{4}$  miles. Increase S-LOC 30R Cat B visibility to  $1\frac{1}{4}$  mile and Cats C/D visibility to  $2\frac{1}{2}$  miles. For inoperative MALS/R, when using Denver Intl altimeter setting, increase S-ILS 30R\* all Cats visibility to 1 mile.  
\* Missed approach requires a minimum climb of 240 feet per NM to 9700.


**MALS/R**  
Climb to 6380 then climbing right turn to 10200 on heading 360° and on FQF VORTAC R-306 to HYGEN INT/FQF 37.9 DME and hold, continue climb-in-hold to 10200.

ATIS <b>126.25</b>	DENVER APP CON <b>125.12 263.02</b>	METRO TOWER* <b>118.6 (CTAF) 233.7</b>	GND CON <b>121.7</b>	CLNC DEL <b>132.6</b>
-----------------------	--	---	-------------------------	--------------------------

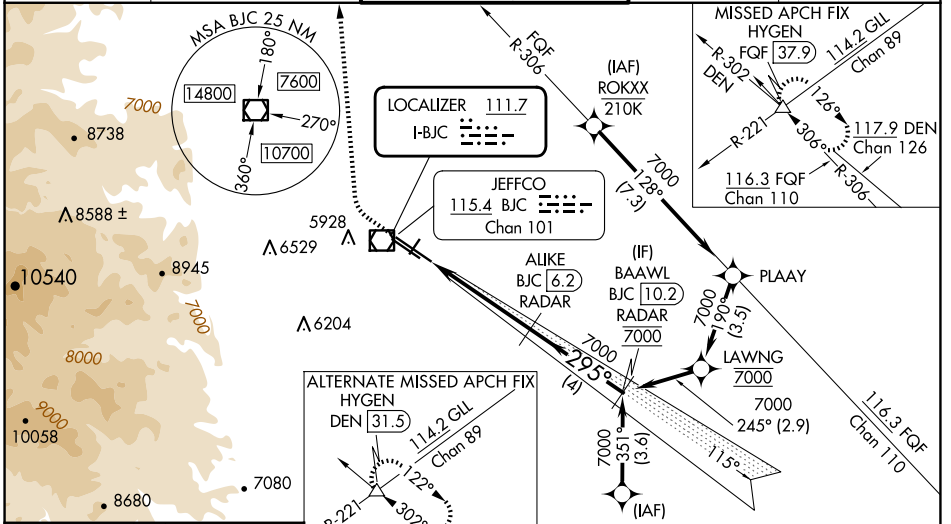

ELEV 5673	<b>D</b> TDZE 30R 5599 TDZE 30L 5628
-----------	---

### RADAR OR GPS REQUIRED

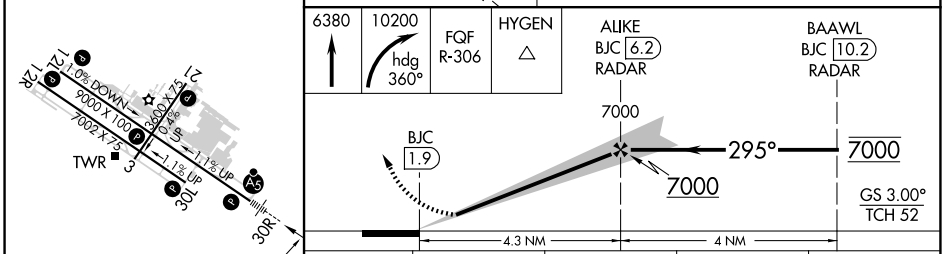

CATEGORY	A	B	C	D
S-ILS 30R		*5799- $\frac{1}{2}$	200 (200- $\frac{1}{2}$ )	
S-ILS 30R		6124- $1\frac{3}{8}$	525 (500- $1\frac{3}{8}$ )	
S-LOC 30R	6300- $\frac{1}{2}$	701 (700- $\frac{1}{2}$ )	6300- $1\frac{5}{8}$	701 (700- $1\frac{5}{8}$ )
SIDESTEP 30L	6340-1	712 (700-1)	6340-2 712 (700-2)	6340-2 $\frac{1}{4}$ 712 (700-2 $\frac{1}{4}$ )
<b>C</b> CIRCLING	6340-1	667 (700-1)	6360-2 687 (700-2)	6860-3 1187 (1200-3)

HIRL Rwy's 12L-30R **1**  
MIRL Rwy's 3-21 and 12R-30L **1**  
REIL Rwy's 12L, 12R and 30L **1**  
FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

SW-1, 20 MAR 2025 to 17 APR 2025

SW-1, 20 MAR 2025 to 17 APR 2025