

LOC I-BPM 111.9	APP CRS 133°	Rwy Idg TDZE Apt Elev	7000 1031 1031
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 13
ST CLOUD RGNL (STC)


DME required.

⚠ For inop ALS when using Little Falls altimeter setting, increase S-ILS-13 all Cats visibility to ¾ SM. When local altimeter setting not received, use Little Falls altimeter setting, increase DA to 1307 feet; increase all MDAs 80 feet and S-LOC 13 visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ¼ SM. For inop ALS, increase S-LOC 13 Cats C and D visibility to 1¾ SM. DME from STC VOR/DME. DME use requires simultaneous reception of I-BPM and STC DME. VDP NA when using Little Falls altimeter setting.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and on STC VOR/DME R-312 to SIYON/STC 14.5 DME and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
------------------------	---	---	--------------------------

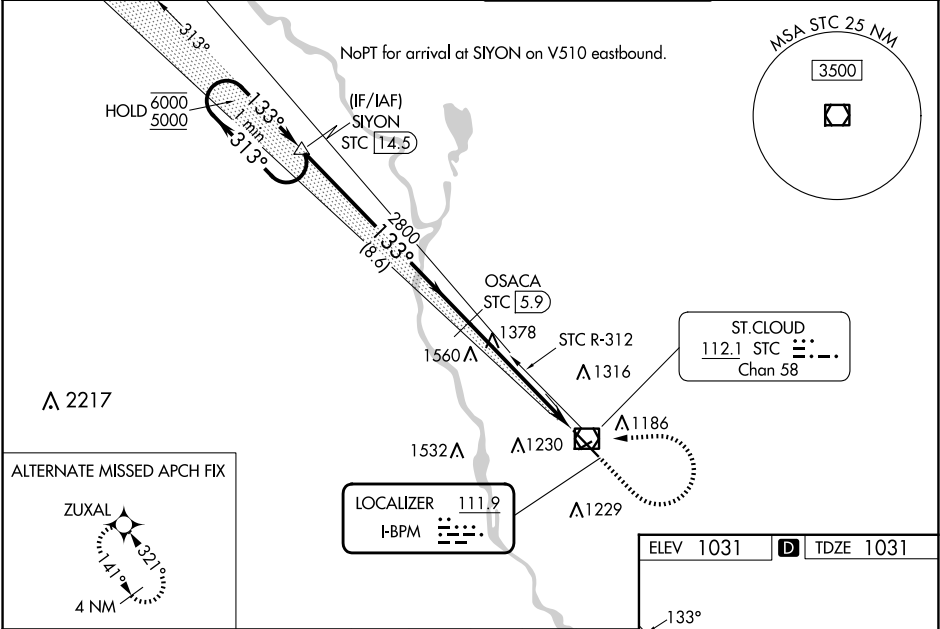

One Minute Holding Pattern				
SIYON STC 14.5				
OSACA STC 5.9				
STC 2.3				
GS 3.00° TCH 49				
8.6 NM 3.7 NM 1.8 NM				
CATEGORY	A	B	C	D
S-ILS 13	1231-½ 200 (200-½)			
S-LOC 13	1640-½ 609 (700-½)		1640-1¾ 609 (700-1¾)	
CIRCLING	1640-1 609 (700-1)		1640-1¾ 609 (700-1¾) 1860-2¾ 829 (900-2¾)	

ELEV 1031 D TDZE 1031

MIRL Rwy 5-23 0
HIRL Rwy 13-31 0

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Seq	5:24	3:36	2:42	2:10	1:48