

LOC I- STC	APP CRS	Rwy Idg	7000
111.9	313°	TDZE	1020
		Apt Elev	1031

ILS or LOC RWY 31

ST CLOUD RGNL (STC)

DME required.



NA

When local altimeter setting not received, use Little Falls altimeter setting, increase DA to 1296 feet, increase all MDAs 80 feet and S-LOC 31 visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ¼ SM. For inop ALS when using Little Falls altimeter setting, increase S-ILS-31 visibility to ¾ SM and S-LOC-31 Cats C and D visibility to 1 ¾ SM. VDP NA when using Little Falls altimeter setting. DME from STC VOR/DME. DME use requires simultaneous reception of I-STC and STC DME.

MALSR

MISSED APPROACH: Climb to 2800 then climbing left turn to 3500 direct STC VOR/DME and on STC VOR/DME R-134 to SANLY/STC VOR/DME 14.1 DME and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER★ 118.25 (CTAF)	GND CON 123.75
------------------------	---	--	--------------------------

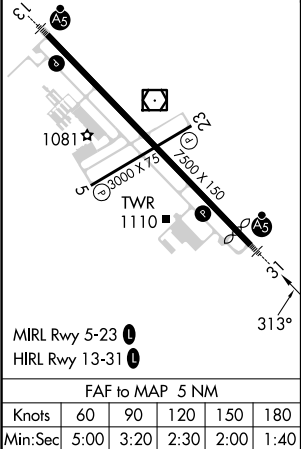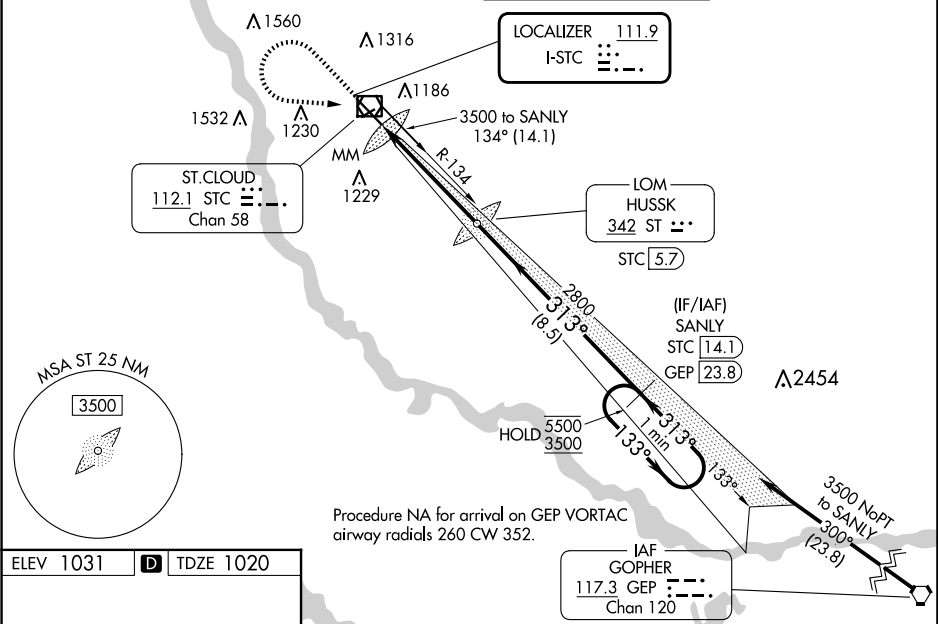

2800	3500	STC	STC R-134	SANLY STC 14.1	SANLY STC 14.1	One Minute Holding Pattern
				ST LOM HUSSK STC 5.7		
		STC 1.9		2671	313°	133° 5500
		MM		2800	313°	3500
		0.5 0.7	3.8 NM	8.5 NM		GS 3.00° TCH 51
CATEGORY	A	B	C	D		
S-ILS 31	1220-½		200 (200-½)			
S-LOC 31	1460-½ 440 (500-½)		1460-¾ 440 (500-¾)			
CIRCLING	1500-1 469 (500-1)		1620-1½ 589 (600-1½) 1860-2¾ 829 (900-2¾)			