


WAAS CH 66008 W18A	APP CRS 181°	Rwy Idg 5002 TDZE 239 Apt Elev 239
--	------------------------	---

RNAV (GPS) RWY 18
NEWPORT RGNL (M19)

RNP APCH-GPS. ⚠ When local altimeter setting not received, use Batesville altimeter setting: increase LPV DA to 575 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 845 feet and all visibilities ½ SM; increase all MDAs 100 feet and visibility Cats C ¼ SM and D ½ SM. VDP NA when using Batesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV NA when using Batesville altimeter setting.	MISSED APPROACH: Climb to 3000 direct VURHU and hold.
--	---

AWOS-3PT 118.15	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

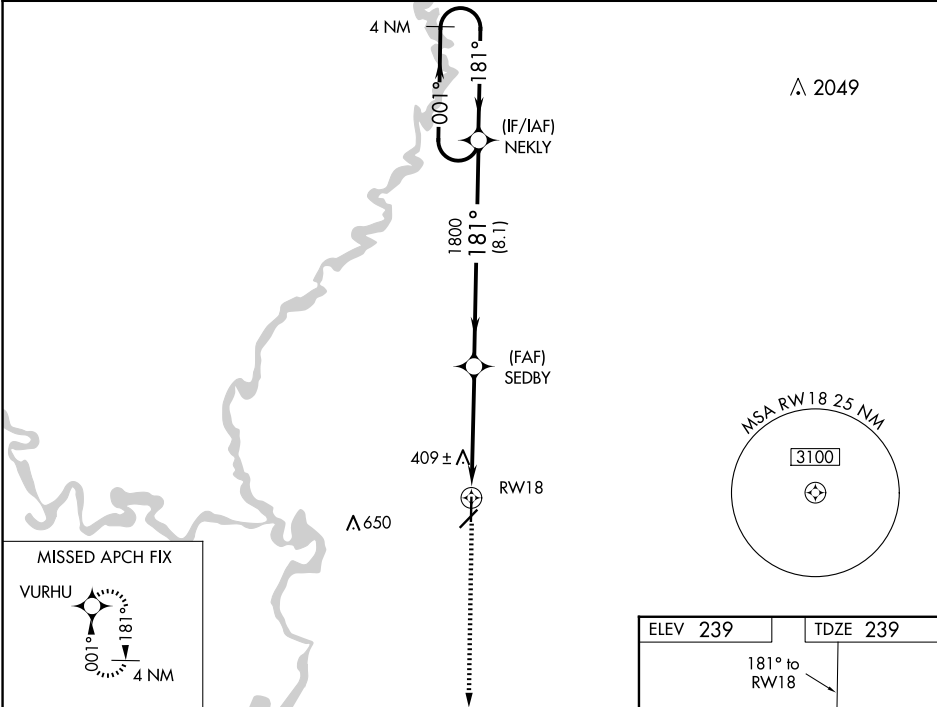

3000	VURHU	NEKLY	4 NM Holding Pattern
*LNAV only.	*1.3 NM to RW18	SEDBY	181°
RW18	1800	181°	3000
1.3	3.4 NM	8.1 NM	GP 3.00° TCH 44
CATEGORY	A	B	C
LPV DA	489-3¼	250 (300-¾)	
LNAV/VNAV DA	759-1¾	520 (600-1¾)	
LNAV MDA	700-1	461 (500-1)	700-1¼
CIRCLING	760-1	521 (600-1)	760-1½

