# NANDR TWO DEPARTURE (RNAV)

LONE STAR DEP CON
125.2 343.65

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

**TOP ALTITUDE: ASSIGNED BY ATC**

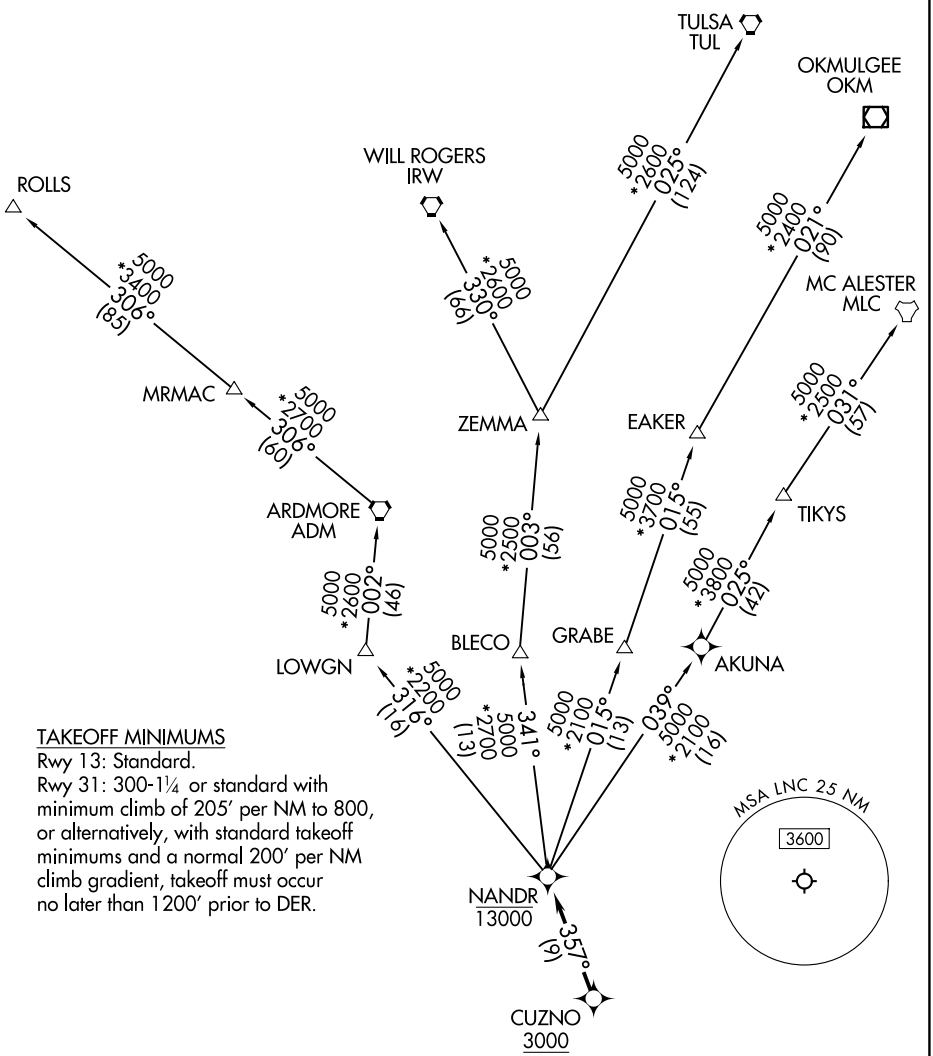


TAKEOFF MINIMUMS
Rwy 13: Standard.
Rwy 31: 300-1¼ or standard with minimum climb of 205′ per NM to 800, or alternatively, with standard takeoff minimums and a normal 200′ per NM climb gradient, takeoff must occur no later than 1200′ prior to DER.

NOTE: EAKER Transition: For TUL terminal arrivals only.
NOTE: TULSA Transition: For all aircraft overflying TUL VORTAC.
NOTE: Aircraft arriving to the Oklahoma City terminal area, file and expect the ZEMMA enroute transition.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)