

WAAS CH 99605 W07A	APP CRS 071°	Rwy Idg TDZE Apt Elev	5008 5 5
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) RWY 7


THE FLORIDA KEYS MARATHON INTL (MTH)

RNP APCH-GPS.

▼ Baro-VNAV and VDP NA when using Key West Intl altimeter setting. Rwy 7 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Key West Intl altimeter setting: increase LPV DA to 482 feet, LNAV/VNAV DA to 534 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ SM, increase all MDAs 100 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM and Circling Cat D ½ SM.

MISSED APPROACH: Climb to 2000 direct LOGEY and hold.

ASOS 135.525	MIAMI CENTER 133.5 306.9	UNICOM 122.975 (CTAF) 0
------------------------	------------------------------------	-----------------------------------

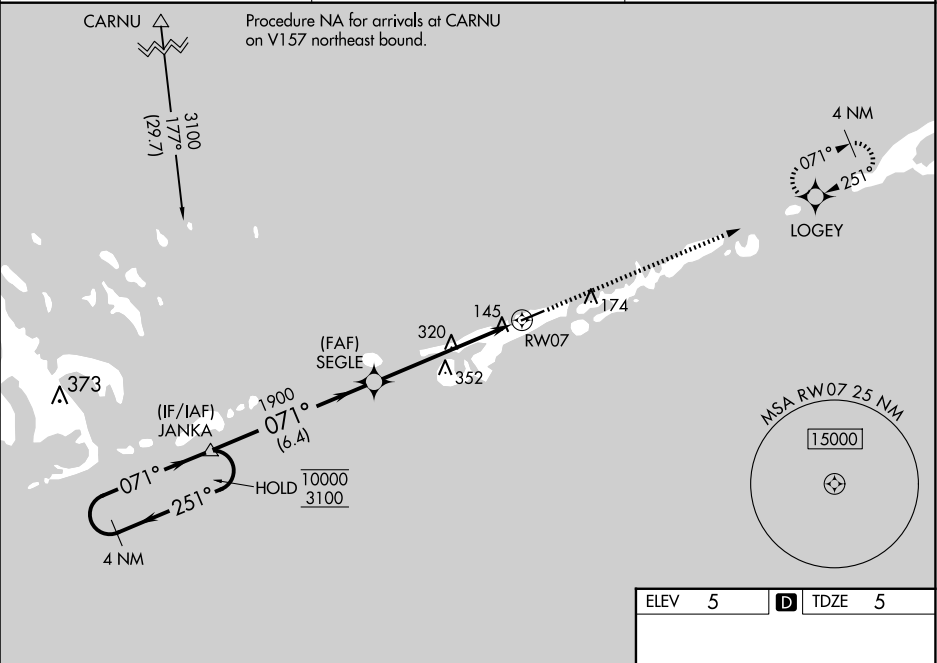

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24).

2000 LOGEY

10000 3100

GP 3.00° TCH 40

251° 071°

071°

1900

6.4 NM 4 NM 1.7 NM

1.7 NM to RW07

RW07

5008 X 100

62

071° to RW07

CATEGORY	A	B	C	D
LPV DA		389-1⅞	384 (400-1⅞)	
LNAV/VNAV DA		441-1¼	436 (500-1¼)	
LNAV MDA	600-1	595 (600-1)	600-1¾	595 (600-1¾)
CIRCLING	600-1	595 (600-1)	620-1¾ 615 (700-1¾)	660-2 655 (700-2)

REIL Rwy 7 0
MIRL Rwy 7-25 0

SE-3, 20 MAR 2025 to 17 APR 2025

SE-3, 20 MAR 2025 to 17 APR 2025