

MILFORD, IOWA

AL-6455 (FAA)


23278

VOR/DME SPW 115.15 Chan 98 (Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev N/A N/A 1439
--	------------------------	--

VOR-A
FULLER(4D8)

DME required. RADAR required for procedure entry.	MISSED APPROACH: Climbing right turn to 3000 direct SPW VOR/DME and hold.
NA Circling NA to Rwys 18 and 36. Procedure NA at night. Use Spencer altimeter setting, when not received, use Estherville altimeter setting and increase all MDA 40 feet.	

SPW ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	CTAF 122.9
----------------------------	---	----------------------

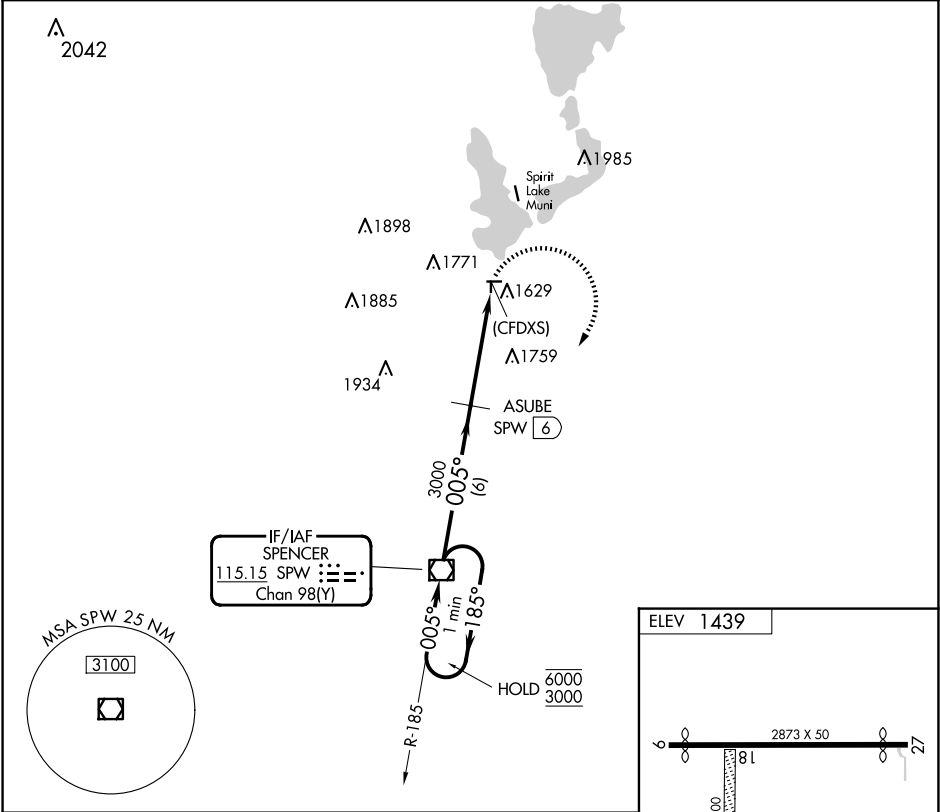

One Minute Holding Pattern		SPW VOR/DME	ASUBE SPW 6	3000	SPW												
6 NM		4.4 NM		URL Rwy 9-27 and 18-36													
CATEGORY	A	B	C	D	FAF to MAP 4.4 NM												
CIRCLING	2100-1 661 (700-1)		NA		<table><tr><td>Knots</td><td>60</td><td>90</td><td>120</td><td>150</td><td>180</td></tr><tr><td>Min:Sec</td><td>4:24</td><td>2:56</td><td>2:12</td><td>1:46</td><td>1:28</td></tr></table>	Knots	60	90	120	150	180	Min:Sec	4:24	2:56	2:12	1:46	1:28
Knots	60	90	120	150	180												
Min:Sec	4:24	2:56	2:12	1:46	1:28												

MILFORD, IOWA

43°20'N-95°10'W

FULLER(4D8)

Amtd 1 03JAN19

VOR-A

NC-3, 20 MAR 2025 to 17 APR 2025

NC-3, 20 MAR 2025 to 17 APR 2025