

WAAS CH 45803 W19A	APP CRS 187°	Rwy Idg 4206 TDZE 795 Apt Elev 798
--	------------------------	---

RNAV (GPS) RWY 19

SKYHAVEN (RCM)

RNP APCH - GPS.



▼

▲

Baro-VNAV NA when using Whiteman AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Knob Noster altimeter setting and increase LPV DA to 1084 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities ½ SM. Increase all MDAs 40 feet and Circling visibility Cat C ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct
BEJCY and hold.

AWOS-3PT 119.575	WHITEMAN APP CON ★ 127.45 284.0	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------------

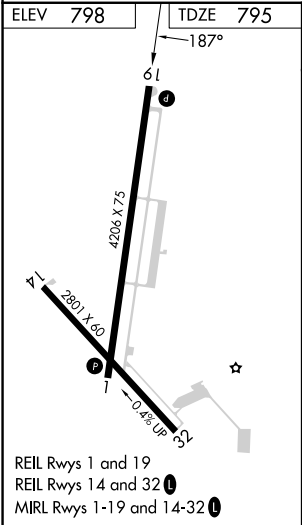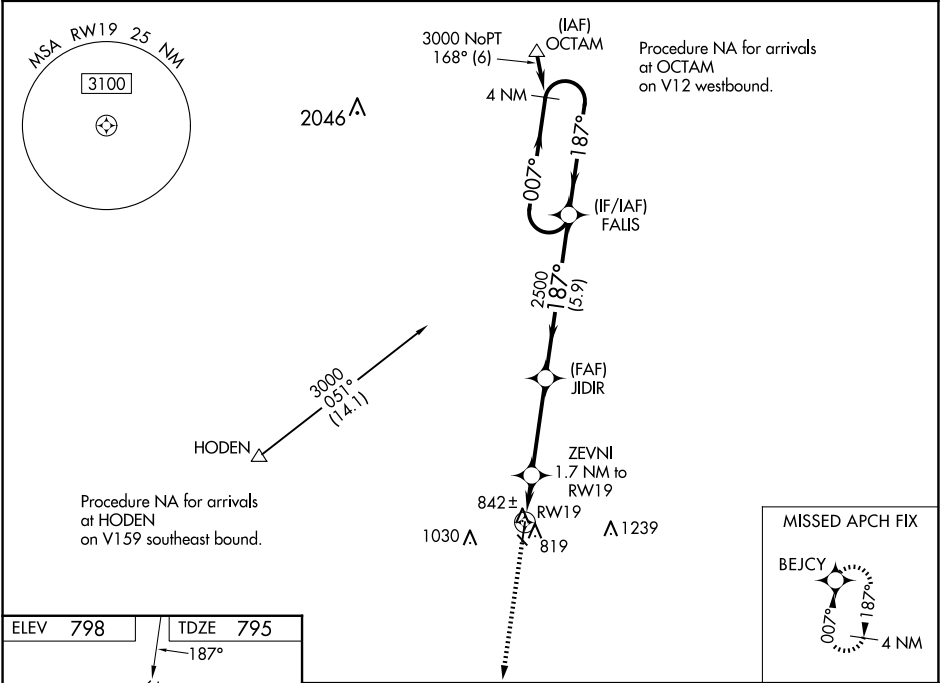

3000 BEJCY		FALS 4 NM Holding Pattern	
*LNAV only.		GP 3.00° TCH 40	
RW19 1.7 NM to RW19		JIDIR 2500	
1360*		2500	
1.7 NM		5.9 NM	
3.5 NM		007° → 3000	
187°		← 187°	
CATEGORY	A	B	C
LPV DA	1045-1	250 (300-1)	NA
LNAV/VNAV DA	1100-1	305 (400-1)	NA
LNAV MDA	1240-1	445 (500-1)	1240-1 3/8 445 (500-1 3/8)
CIRCLING	1260-1 462 (500-1)	1340-1 542 (600-1)	1380-1 1/2 582 (600-1 1/2)