

WAAS CH 63221 W17A	APP CRS 168°	Rwy Idg TDZE Apt Elev	6300 5005 5022
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17


NEPHI MUNI (U14)

RNP APCH - GPS.

Baro-VNAV NA when using Provo Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 12°C. When local altimeter setting not received, use Provo altimeter setting: increase LPV DA to 5577 feet and visibility all Cats ½ SM, increase LNAV/VNAV DA to 5836 feet and visibility all Cats ½ SM; increase all MDAs 160 feet and LNAV and Circling visibilities Cats A/B ½ SM. Circling Cat C NA. VDP NA with Provo Muni altimeter setting.

MISSED APPROACH:
Climb to 11400 direct ACAGO and on track 191° to PILTE and hold.

AWOS-3 118.275	SALT LAKE CENTER 127.825 239.025	UNICOM 123.075 (CTAF) 0
--------------------------	--	-----------------------------------

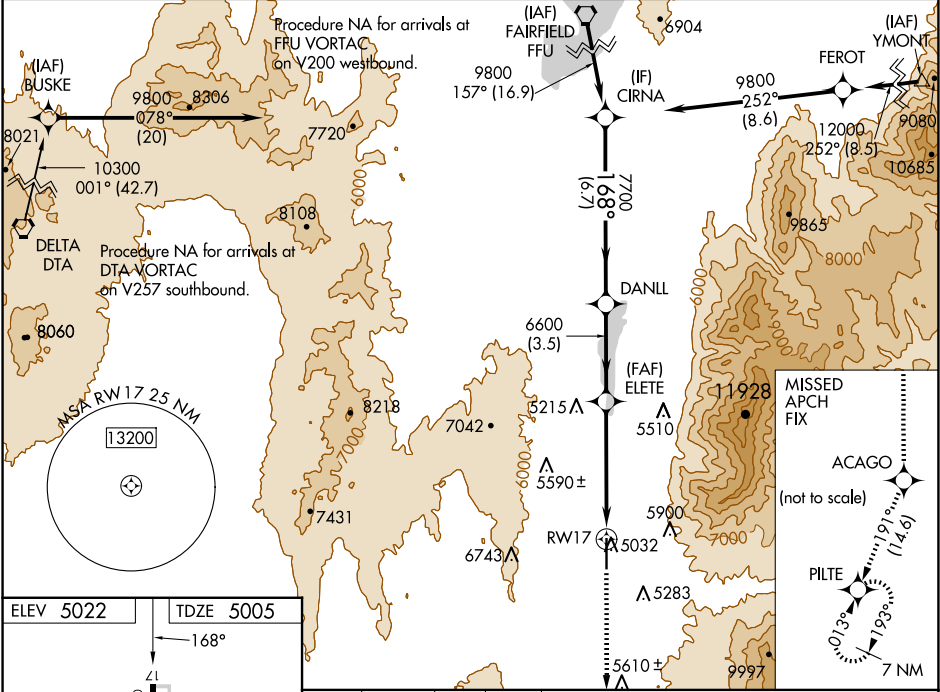

ELEV 5022 | TDZE 5005

168°

ZI

0.6% Up

6300

100

35

MIRL Rwy 17-35 0

REIL Rwy 17 and 35 0

11400 ↑	ACAGO ✧	tr 191°	PILTE ✧					CIRNA
*LNAV only.		*2.4 NM to RW17		ELETE ✕	DANLL	168°		9800
RW17 ↻		6600		6600	7700			GP 3.00° TCH 40°
2.4 NM		2.5 NM		3.5 NM		6.7 NM		
CATEGORY		A		B		C		D
LPV	DA	5433-1½		428 (400-1½)				
LNAV/ VNAV	DA	5692-2½		687 (700-2½)				
LNAV MDA		5800-1 795 (800-1)	5800-1¼ 795 (800-1¼)	5800-2½		795 (800-2½)		
CIRCLING		5800-1 778 (800-1)	5800-1¼ 778 (800-1¼)	6920-3 1898 (1900-3)		NA		