

WAAS CH 90116 W01A	APP CRS 013°	Rwy Idg TDZE Apt Elev	6000 467 488
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 1

BEECH RIVER RGNL (PVE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5° F) or above 54°C (130°F).
⚠ DME/DMÉ RNP-0.3 NA. When local altimeter setting not received, use Jackson altimeter setting: increase LPV all Cats DA to 807 and all Cats visibility ¾ mile; increase LNAV/VNAV all Cats DA to 911 and all Cats visibility ¾ mile; increase all MDA 100 feet and LNAV Cats C/D and Circling Cat C visibility ½ mile and Circling Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Jackson altimeter setting.

MISSED APPROACH:
Climb to 3000 direct EYODI and hold.

AWOS-3 118.125	MEMPHIS CENTER 125.85 379.25	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

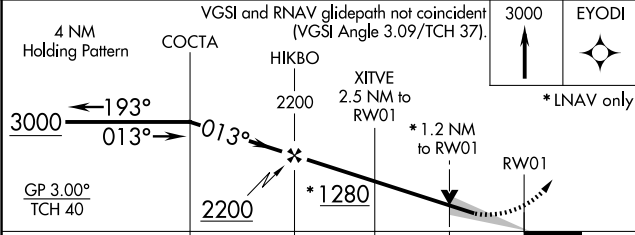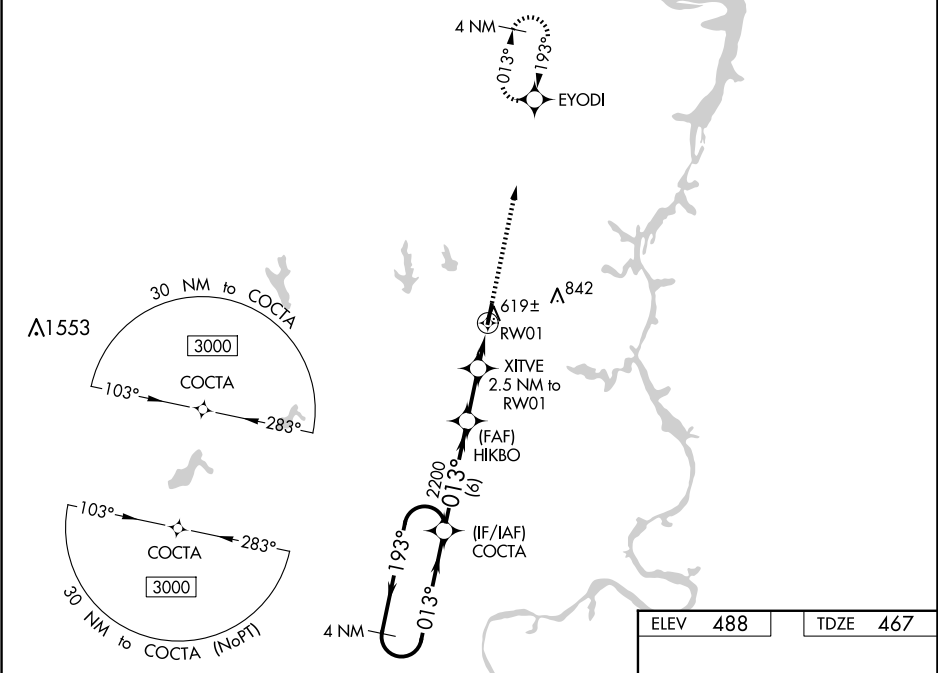

CATEGORY	A	B	C	D
LPV DA	717-7/8		250 (300-7/8)	
LNAV/VNAV DA	821-1¼		354 (400-1¼)	
LNAV MDA	880-1	413 (400-1)	880-1½	413 (400-1½)
CIRCLING	940-1	980-1	1000-1½	1200-2¼
	452 (500-1)	492 (500-1)	512 (600-1½)	712 (800-2¼)

