


WAAS CH 99311 W12A	APP CRS 123°	Rwy Idg 4000 TDZE 42 Apt Elev 42
--	------------------------	---

RNAV (GPS) RWY 12
QUINHAGAK (AQH) (PAQH)

RNP APCH.	Procedure NA at night. Baro-VNAV and VDP NA when using Kipnuk altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Kipnuk altimeter setting and increase all DA and MDA 160 feet; increase LPV all Cats visibility and LNAV/VNAV all Cats visibility 1/8 SM, LNAV Cats C, D visibility 3/8 SM, increase Circling Cat C visibility 1/2 SM, increase Circling Cat D visibility 1/4 SM.	MISSED APPROACH: Climb to 5200 direct CUTEB and hold, continue climb-in-hold to 5200.
-----------	---	---

AWOS-3P 121.575	ANCHORAGE CENTER 125.2 372.0	KENAI RADIO 122.1	UNICOM 122.8 (CTAF) 0
---------------------------	--	-----------------------------	---------------------------------

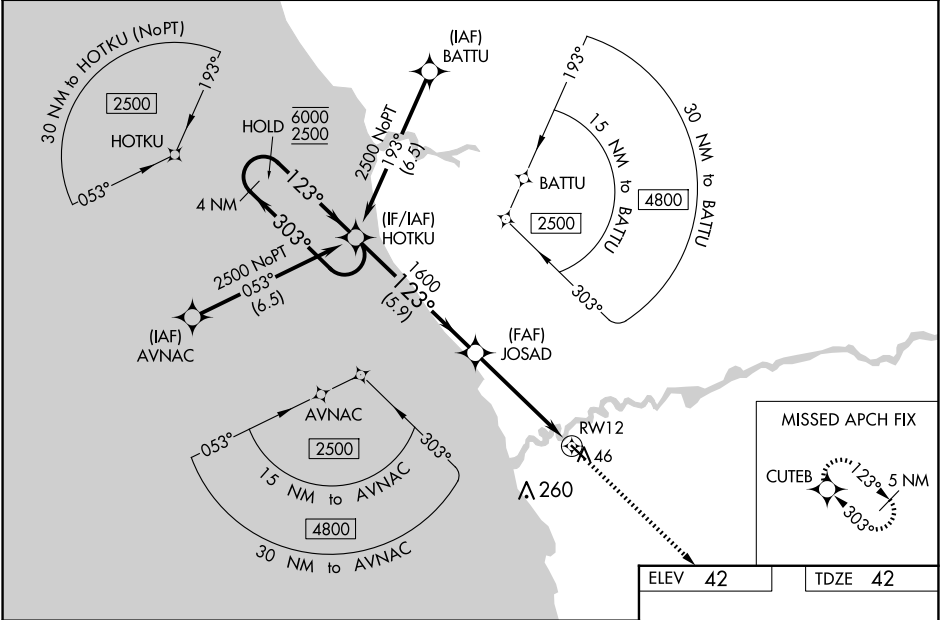

4 NM Holding Pattern		HOLD 6000 2500		5200 CUTEB	
6000 2500		303° 123°		*LNAV only.	
GP 3.00° TCH 35		123°		RWY 12	
5.9 NM		3.4 NM		1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	292-1 250 (300-1)				
LNAV/VNAV DA	292-1 250 (300-1)				
LNAV MDA	500-1 458 (500-1)		500-1 3/8 458 (500-1 3/8)		
CIRCLING	500-1 458 (500-1)		580-1 1/2 538 (600-1 1/2)		600-2 558 (600-2)
MIRL Rwy 12-30 0					

AK, 20 FEB 2025 to 17 APR 2025

AK, 20 FEB 2025 to 17 APR 2025