| LOC/DME I-SHR | APP CRS | Rwy Idg | 8301 |
|---|---|---|---|
| 108.7 | 326° | TDZE | 3985 |
| Chan 24 | | Apt Elev | 4021 |

# ILS or LOC/DME RWY 33

SHERIDAN COUNTY (SHR)

T A -19°C — When local altimeter setting not received, procedure NA. Night landing: Rwy 24 NA. For inoperative MALSR, increase S-LOC 33 Cats C and D visibility to ⅞ mile.

MALSR

MISSED APPROACH: Climb to 7000 on heading 326° and on SHR VOR/DME R-127 to SHR VOR/DME and hold, continue climb-in-hold to 7000.

| ASOS | SALT LAKE CENTER | UNICOM |
|---|---|---|
| 135.175 | 127.75 351.9 | 123.0 (CTAF) L |

SHERIDAN I-SHR 113.55 SHR Chan 82(Y)

LOCALIZER 108.7 I-SHR Chan 24

R-316 136° 316° R-127

9700 to KEKNE 143° (26.2)

MSA SHR 25 NM: 113° 6700 14400 308°

4097 4674 4328 4022± 4753

CIVSA I-SHR 4.9

NITLE I-SHR 8.1

FEKLI I-SHR 11.5

SORKE I-SHR 15.3

5802 5607 7200 326° (3.8)

5726 (6.3) 326° 7900

(IF/IAF) KEKNE I-SHR 21.5

1 min 146° 326° 146° 318° (31.1)

9100 NoPT to KEKNE

IAF CRAZY WOMAN 117.3 CZI Chan 120

DME REQUIRED

9489 10147 10828 11050 9358 8680 11560 11760 13167 11000 11112 6827

5000 7000 9000

ELEV 4021 D TDZE 3985

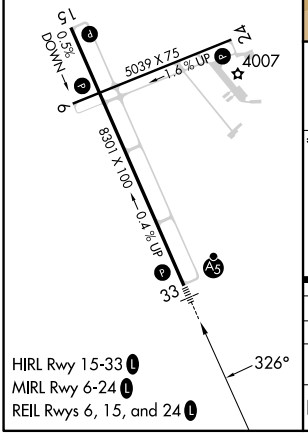


HIRL Rwy 15-33 L
MIRL Rwy 6-24 L
REIL Rwys 6, 15, and 24 L

7000 hdg 326° | SHR R-127 | SHR

Use I-SHR DME when on the localizer course.

*LOC only. *I-SHR I-SHR 2.3 I-SHR 1.5 CIVSA I-SHR 4.9 NITLE I-SHR 8.1 FEKLI I-SHR 11.5 SORKE I-SHR 15.3 KEKNE I-SHR 21.5 One Minute Holding Pattern

5100* 6100* 7200 7200 326° 7900 146° 326° 9100

GS 3.00° TCH 55

0.8 2.6 NM 3.2 NM 3.4 NM 3.8 NM 6.3 NM

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 33 | 4185-½ 200 (200-½) | | | |
| S-LOC 33 | 4280-½ 295 (300-½) | | | |
| C CIRCLING | 4600-1 579 (600-1) | 4640-1 619 (700-1) | 4860-2½ 839 (900-2½) | 5220-3 1199 (1200-3) |



NW-1, 17 APR 2025 to 15 MAY 2025
NW-1, 17 APR 2025 to 15 MAY 2025