




WAAS CH 99732 W10A	APP CRS 101°	Rwy Idg 8005 TDZE 38 Apt Elev 40
--	------------------------	---

RNAV (GPS) RWY 10
Wallops Flight Facility (WLF)

▼ DME/DME RNP -0.3 NA. Rwy 10 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Salisbury altimeter setting and increase all DA 60 feet and all visibilities $\frac{1}{4}$ SM. Increase all MDA 60 feet and all Cat C and D visibilities $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Salisbury altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 direct MAGGO and hold.

ASOS 119.175	PATUXENT APP CON ★ 127.95 314.0	WALLOPS TOWER ★ 126.5 (CTAF) 0 306.975 (CTAF) 0	GND CON 127.875 269.325	CLNC DEL 121.7
------------------------	---	---	-----------------------------------	--------------------------

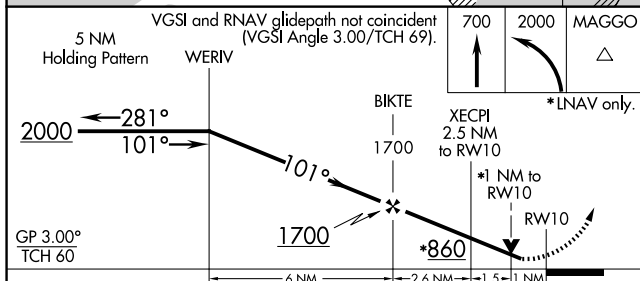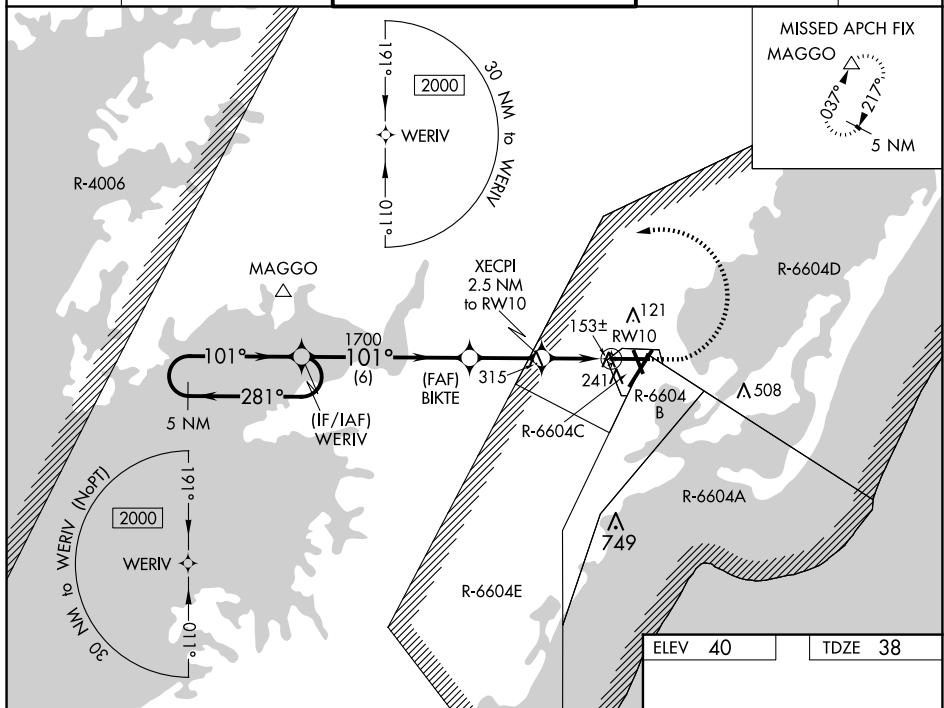

CATEGORY	A	B	C	D
LPV DA	330-1	292 (300-1)		
LNAV/ DA VNAV	443-1¼	405 (500-1¼)		
LNAV MDA	420-1	382 (400-1)	420-1⅞	382 (400-1⅞)
 CIRCLING	600-1	560 (600-1)	620-1½ 580 (600-1½)	860-2¾ 820 (900-2¾)

REIL all Rwy's
HIRL Rwy's 4-22, 10-28 and 17-35