


WAAS CH 86234 W22A	APP CRS 223°	Rwy Idg 8748 TDZE 36 Apt Elev 40
--	------------------------	---

RNAV (GPS) RWY 22
Wallops Flight Facility (WAL)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME-RNP 0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 367 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 489 and all Cats visibility ½ mile; increase all MDA 60 feet and LNAV Cats C/D visibility ½ mile and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH:
Climb to 600 then climbing right turn to 2000 direct MAGGO and hold.

ASOS 119.175	PATUXENT APP CON ★ 127.95 314.0	Wallops Tower ★ 126.5 (CTAF) 0 306.975 (CTAF) 0	GND CON 127.875 269.325	CLNC DEL 121.7
------------------------	---	---	-----------------------------------	--------------------------

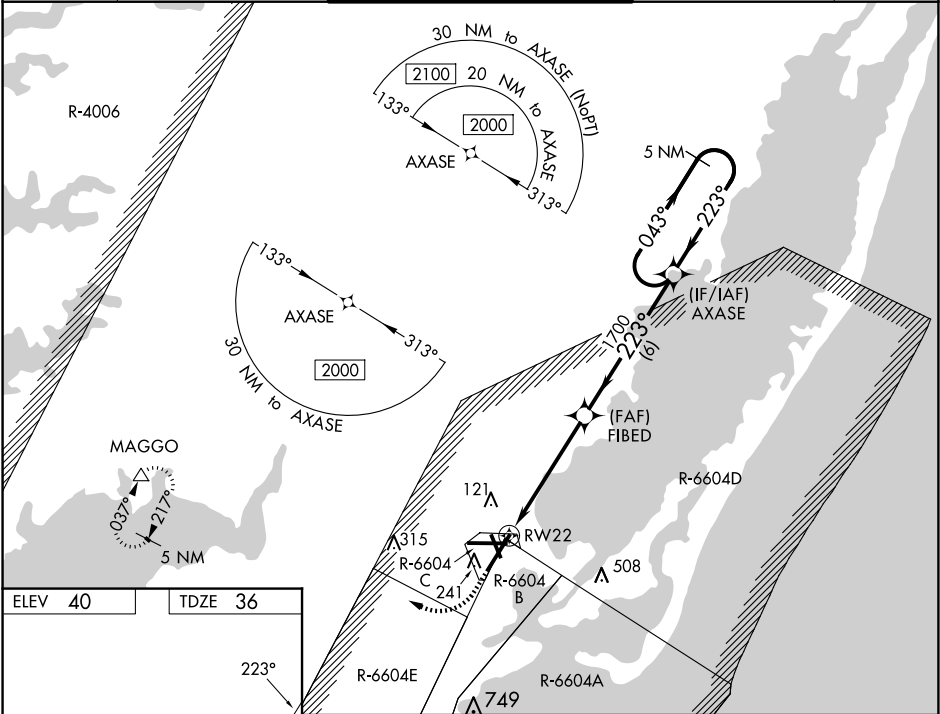

ELEV 40 TDZE 36

REIL all Rwy's
HIRL Rwy's 4-22, 10-28 and 17-35

600	2000	MAGGO	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 60).	
↑	↻	△	AXASE	5 NM Holding Pattern
* LNAV only.		* 1.3 NM to RW22	FIBED	GP 3.00° TCH 50
↻ RW22		1700	223°	043° → 2000
↻		1700	223°	← 223°
↻		1.3 NM	3.8 NM	6 NM
CATEGORY	A	B	C	D
LPV DA	314-7⁄8		278 (300-7⁄8)	
LNAV/VNAV DA	436-1⁄8		400 (400-1⁄8)	
LNAV MDA	500-1	464 (500-1)	500-1⁄8	464 (500-1⁄8)
CIRCLING	600-1	560 (600-1)	620-1½ 580 (600-1½)	860-2¾ 820 (900-2¾)

NE-3, 17 APR 2025 to 15 MAY 2025

NE-3, 17 APR 2025 to 15 MAY 2025