


|                                               |                                            |                                                                                                                                                                                                                                                                |
|-----------------------------------------------|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RNAV 1 - DME/DME/IRU or GPS.                  | TOP ALTITUDE:<br>(JETS/PROPS)<br>5000 4000 | D-ATIS DEP 135.3<br>CINCINNATI TOWER<br>118.3 (RWYS 18C/36C, 9/27)<br>118.975 360.85 (RWY 18L/36R)<br>133.325 (RWY 18R/36L)<br>GND CON<br>121.7<br>CLNC DEL<br>127.175<br>CPDLC<br>CINCINNATI DEP CON<br>126.65 254.25 (001°-180°)<br>128.7 254.25 (181°-360°) |
| RADAR required for non-GPS equipped aircraft. |                                            |                                                                                                                                                                                                                                                                |

TAKEOFF MINIMUMS:  
Rwys 9, 18L/C/R, 27, 36L/C/R: Standard.

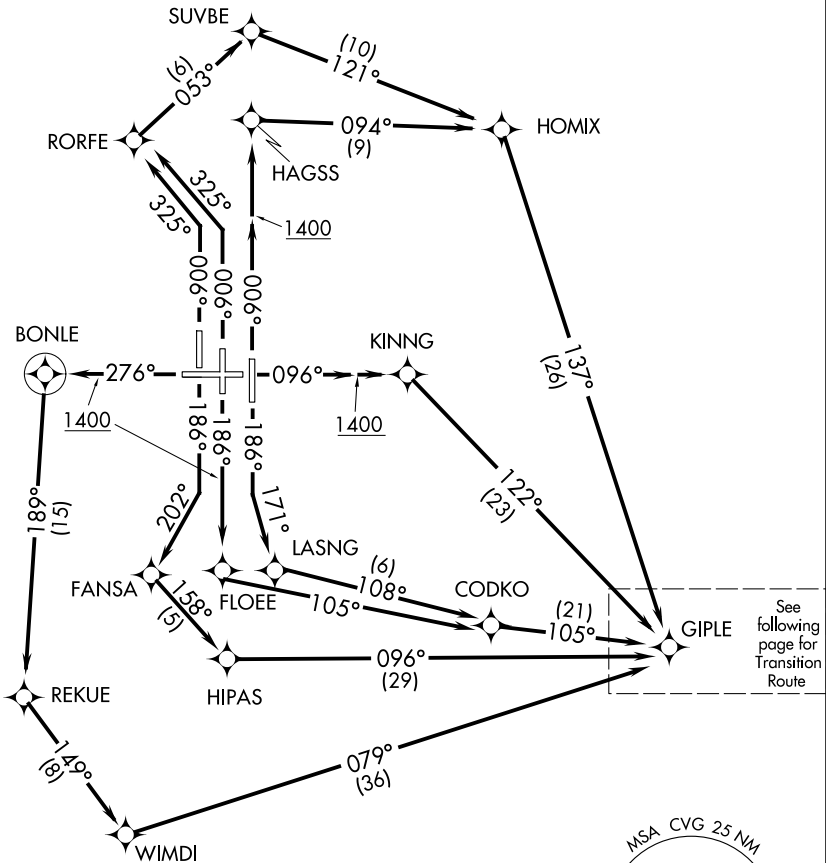

NOTE: Transponder code will be issued via PDC or Cincinnati CLNC DEL.  
NOTE: Increase speed to 250K until reaching/leaving 10000'. If unable, advise ATC.

NOTE: Chart not to scale. (CONTINUED ON FOLLOWING PAGE)