


LOC I-JDP 108.7	APP CRS 276°	Rwy Idg TDZE Apt Elev	12000 875 896
---------------------------	------------------------	-----------------------------	--

ILS or LOC RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)


RADAR required for procedure entry.

▼ For inop ALS, increase S-LOC 27 Cat C/D visibility to 1½ SM.
 ** RVR 1800 authorized with use of FD or AP or HUD to DA.


MALS 

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 on heading 230° and CVG R-244 to AVIEW INT/CVG 20 DME and hold.

D-ATIS ARR 134.375	DEP 135.3	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (RWY 18L/36R) 118.3 (RWYS 18C/36C, 09/27) 133.325 (RWY 18R/36L)	GND CON 121.7	CLNC DEL 127.175	CPDLC
---------------------------------	---------------------	--	---	-------------------------	----------------------------	-------

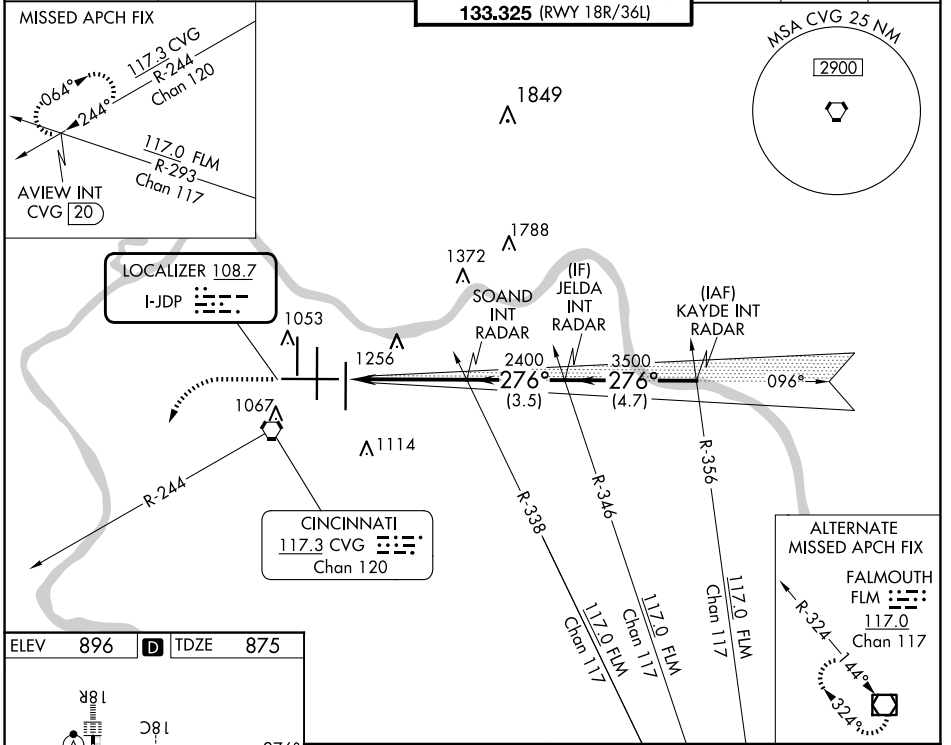

ELEV 896	D	TDZE 875
----------	----------	----------

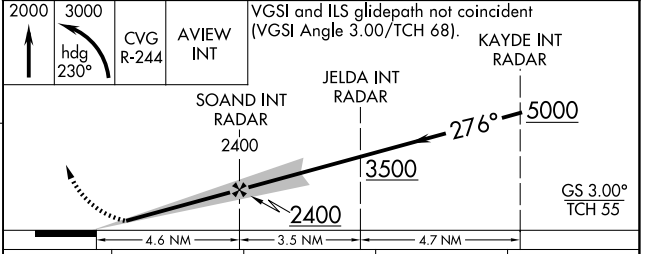

HIRL all Rws
TDZ/CL all Rws except 27

FAF to MAP 4.6 NM

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

CATEGORY	A	B	C	D
S-ILS 27 **	1075/24 200 (200-½)			
S-LOC 27	1340/24	465 (500-½)	1340/50	465 (500-1)
<input checked="" type="checkbox"/> CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)

SE-1, 17 APR 2025 to 15 MAY 2025

SE-1, 17 APR 2025 to 15 MAY 2025