
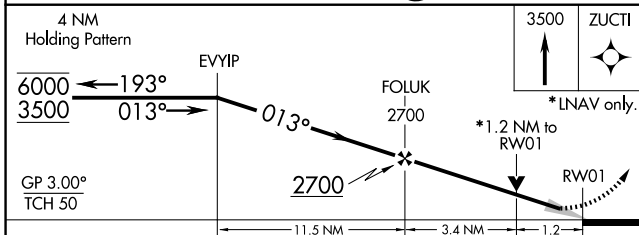



WAAS CH 97431 W01A	APP CRS 013°	Rwy Idg TDZE Apt Elev	9072 1180 1204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1


MARQUETTE/SAWYER RGNL (SAW)

RNP APCH.		MALSR	MISSED APPROACH: Climb to 3500 direct ZUCTI and hold.	
<p>▼ For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.</p>				
AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 1	GND CON 121.65	UNICOM 122.7

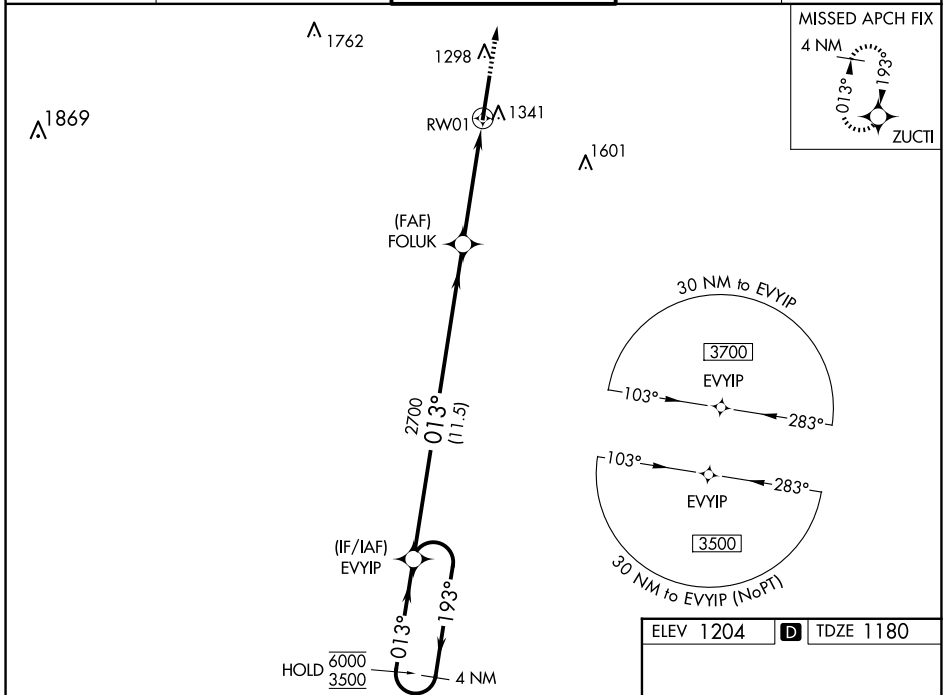

ELEV 1204 **D** TDZE 1180

CATEGORY	A	B	C	D
LPV DA		1380-½	200 (200-½)	
LNAV/VNAV DA		1503-½	323 (300-½)	
LNAV MDA	1600-½	420 (400-½)	1600-¾	420 (400-¾)
C CIRCLING	1680-1	476 (500-1)	1820-1¾ 616 (700-1¾)	1820-2 616 (700-2)

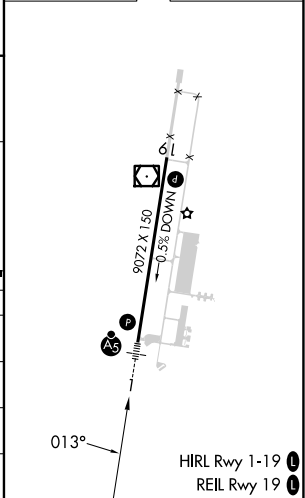

EC-1, 17 APR 2025 to 15 MAY 2025

EC-1, 17 APR 2025 to 15 MAY 2025