WAAS	APP CRS		
CH **42720**	**008°**	Rwy Idg	**8199**
W01A		TDZE	**729**
		Apt Elev	**742**

RNAV (GPS) RWY 1

CHICAGO/ROCKFORD INTL (RFD)

RNP APCH - GPS.

T A ASR For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase LNAV Cats C and D visibility to RVR 6000. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2500 direct WAGET and hold.

ATIS	ROCKFORD APP CON	ROCKFORD TOWER	GND CON	CLNC DEL
127.6	**121.0 327.0**	**118.1 290.375**	**121.9 290.375**	**119.25**

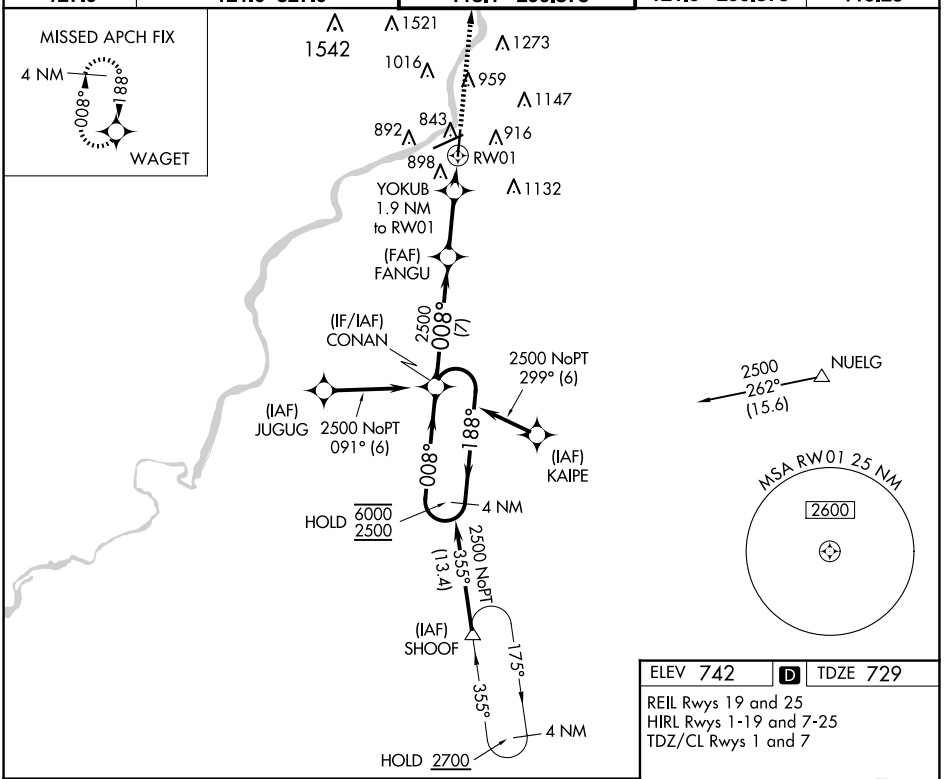

ELEV 742	D	TDZE 729

REIL Rwys 19 and 25
HIRL Rwys 1-19 and 7-25
TDZ/CL Rwys 1 and 7

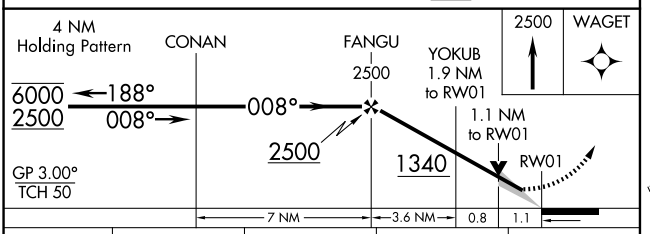

CATEGORY	A	B	C	D
LPV DA*	929/24	200 (200-½)		
LNAV/VNAV DA	1200/60	471 (500-1¼)		
LNAV MDA	1120/24	391 (400-½)	1120/35	391 (400-⅝)
CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1½ 578 (600-1½)	1460-2¼ 718 (800-2¼)

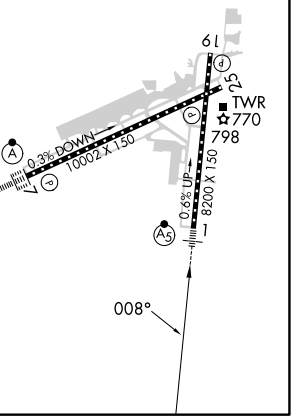

EC-3, 17 APR 2025 to 15 MAY 2025
EC-3, 17 APR 2025 to 15 MAY 2025