



VOR/DME FFM	APP CRS	Rwy ldg	5639
110.4	115°	TDZE	1182
Chan 41		Apt Elev	1183

VOR RWY 13

FERGUS FALLS MUNI/EINAR MICKELSON FLD (FFM)

V NA When local altimeter setting not received, use Elbow Lake altimeter setting and increase all MDAs 60 feet; increase Circling Cat C/D visibility ¼ SM. EBABY fix minimums increase S-13 Cat C/D and Circling Cat C/D visibility ¼ SM.	MISSED APPROACH: Climb to 3000 then left turn direct FFM VOR/DME and hold.
--	--

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
119.05	126.1 269.2	122.8 (CTAF) 0

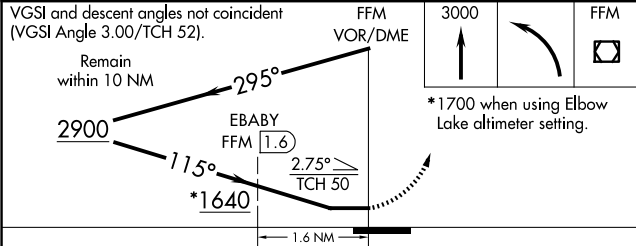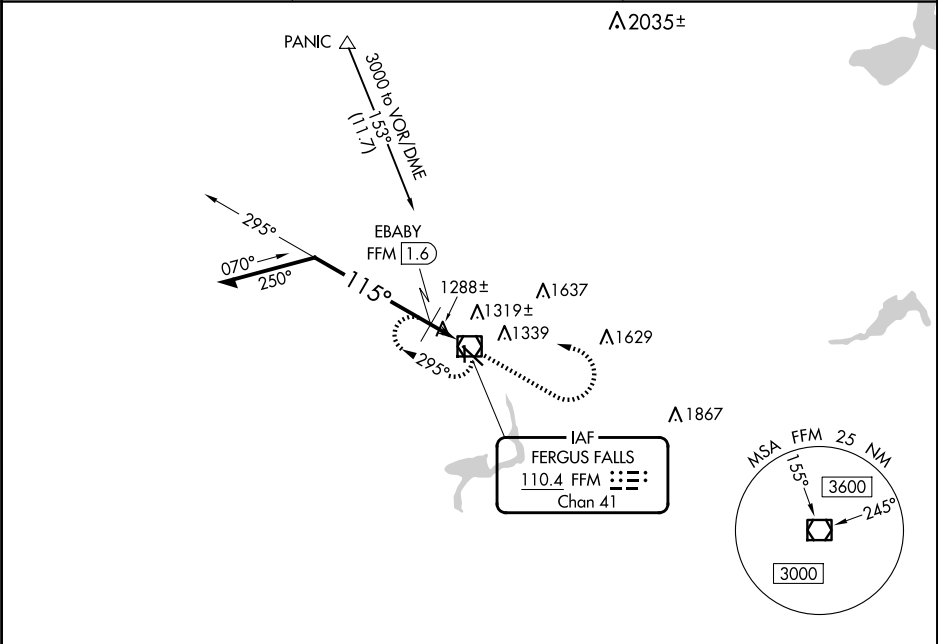

CATEGORY	A	B	C	D
S-13	1640-1	458 (500-1)	1640-1 $\frac{3}{8}$	458 (500-1 $\frac{3}{8}$)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1 $\frac{3}{4}$ 637 (700-1 $\frac{3}{4}$)	1940-2 $\frac{1}{2}$ 757 (800-2 $\frac{1}{2}$)
EBABY FIX MINIMUMS				
S-13	1580-1	398 (400-1)	1580-1 $\frac{1}{8}$	398 (400-1 $\frac{1}{8}$)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1 $\frac{3}{4}$ 637 (700-1 $\frac{3}{4}$)	1940-2 $\frac{1}{2}$ 757 (800-2 $\frac{1}{2}$)

