


APP CRS	Rwy Idg	10000
216°	TDZE	642
	Apt Elev	645

RNAV (RNP) X RWY 22R


DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct DOHNT and hold.
For uncompensated Baro-VNAV systems, procedure NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 5500.		

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	124.05 284.0	135.0 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	120.65	

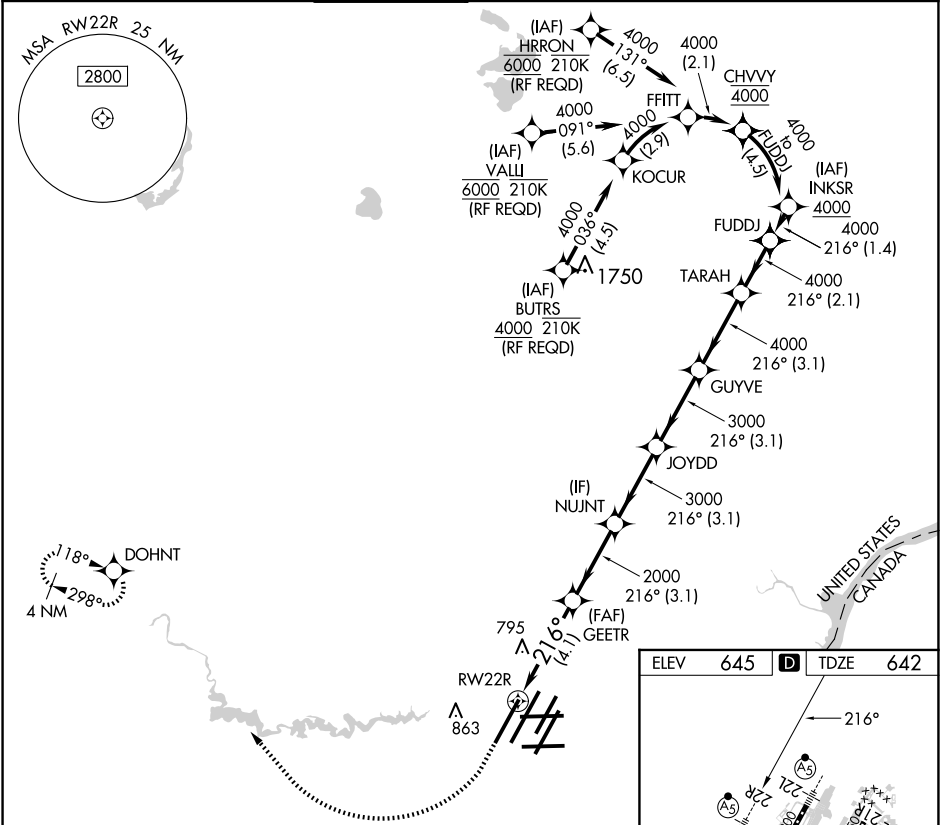

1100 ↑		4000 ↗		DOHNT ✦		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).									
						NUJNT		JOYDD		GUYVE		TARAH		FUDDJ	
RW22R		GEETR		2000		3000		3000		4000		216° 4000		4000	
4.1 NM		3.1 NM		3.1 NM		3.1 NM		3.1 NM		3.1 NM		2.1 NM		GP 3.00° TCH 55	
CATEGORY		A		B		C		D							
RNP 0.30 DA		987/30		345 (400-5%)											

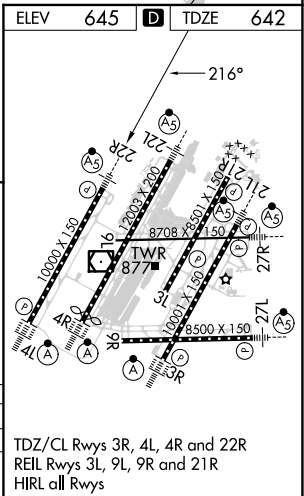

AUTHORIZATION REQUIRED