

WAAS CH 61304 W03A	APP CRS 036°	Rwy Idg 10001 TDZE 633 Apt Elev 645
--	------------------------	--

RNAV (GPS) Z RWY 3R

DETROIT METRO WAYNE COUNTY (DTW)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized.
LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct GAAGE and hold, continue climb-in-hold to 4000.

D-ATIS 133.675	DETROIT APP CON 125.15 284.0	METRO TOWER 118.4 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65	CPDLC
--------------------------	--	-------------------------------------	---	---------------------------	-------

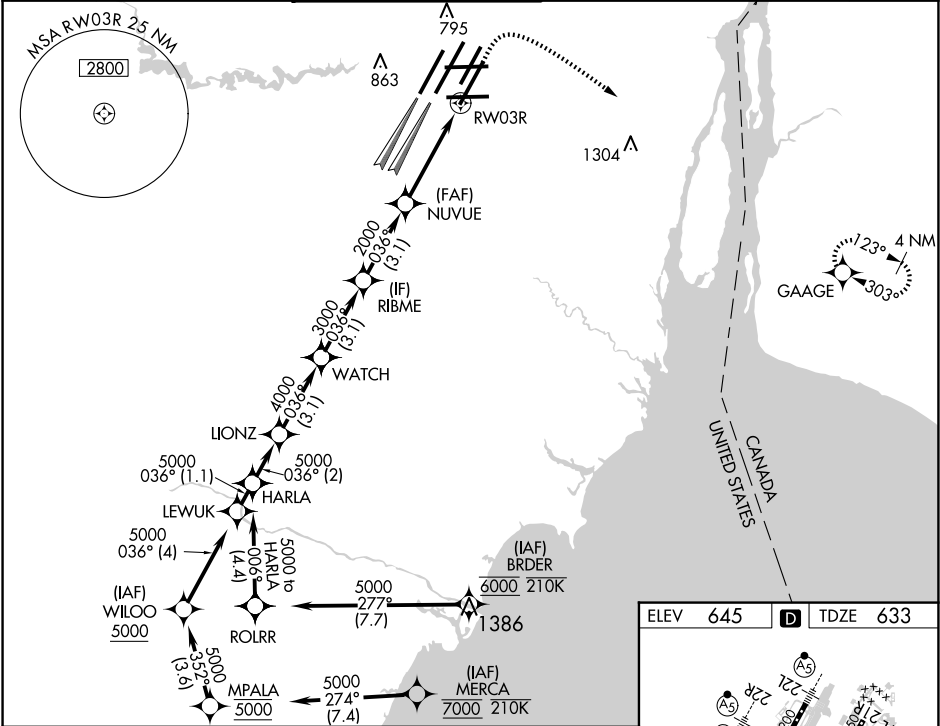

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 70).					1100 4000 GAAGE				
HARLA LIONZ WATCH RIBME NUVUE GAAGE					* LNAV only. * 1.2 NM to RW03R RW03R				
5000 5000 4000 3000 2000					2 NM 3.1 NM 3.1 NM 3.1 NM 2.9 NM 1.2				
CATEGORY		A		B		C		D	
LPV DA				833/18		200 (200-½)			
LNAV/VNAV DA				1013/35		380 (400-¾)			
LNAV MDA		1080/24		447 (500-½)		1080/45		447 (500-¾)	
CIRCLING		1180-1		535 (600-1)		1180-1½		1240-2	
						535 (600-1½)		595 (600-2)	

