

WAAS CH 81809 W22A	APP CRS 223°	Rwy Idg TDZE 598 Apt Elev 598	8001
--	------------------------	---	-------------

RNAV (GPS) RWY 22

ABRAHAM LINCOLN CAPITAL (SPI)

RNP APCH - GPS.

▼

▲


ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
When local altimeter not received, use Lincoln altimeter setting: increase LPV DA to 942 feet and all visibilities ½ SM, LNAV/VNAV DA to 1108 feet and all visibilities ½ SM; increase all MDAs 60 feet and visibility LNAV and Circling Cat C/D ¼ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inop ALS, increase LPV all Cats visibility to ¾ SM. For inop ALS when using Lincoln altimeter setting, increase LPV all Cats visibility to 1 SM, increase LNAV/VNAV all Cats visibility to 1 ½ SM.

MALSR

MISSED APPROACH:
Climb to 2700 direct
COVAC and hold.

ATIS 127.65 270.1	SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.7	UNICOM 122.95
-----------------------------	--	--	-------------------------------	--------------------------	-------------------------

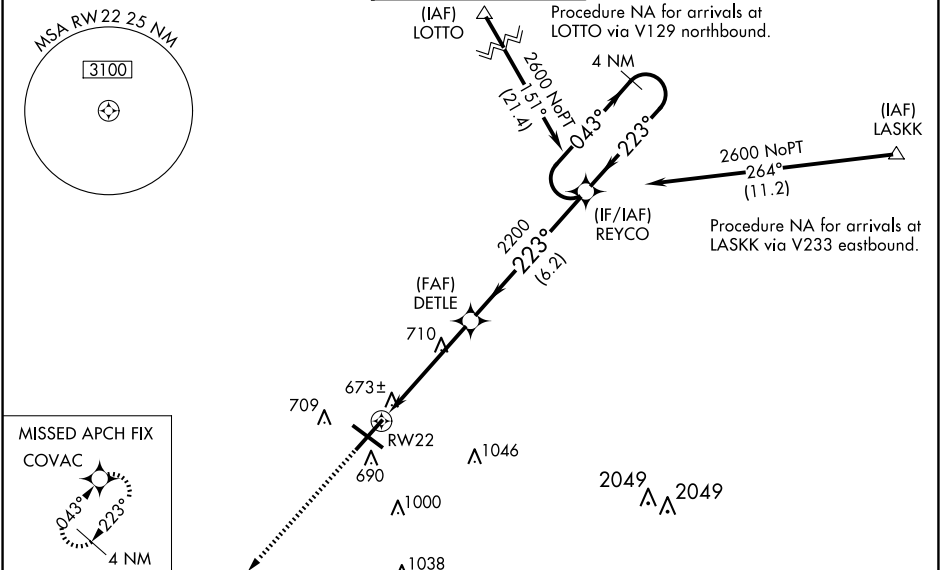

ELEV 598

D

TDZE 598

REIL Rwy 13

HIRL Rwy 4-22 and 13-31

2700

COVAC

REYCO

DETLE

RW22

1 NM to RW22

1 NM

3.8 NM

6.2 NM

GP 3.00°

TCH 54

CATEGORY	A	B	C	D
LPV DA	884-½ 286 (300-½)			
LNAV/VNAV DA	1050-¾ 452 (500-¾)			
LNAV MDA	980-½ 382 (400-½)		980-⅝ 382 (400-⅝)	
CIRCLING	1040-1¼ 442 (500-1¼)	1100-1¼ 502 (600-1¼)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

EC-3, 15 MAY 2025 to 12 JUN 2025

EC-3, 15 MAY 2025 to 12 JUN 2025