


ILS RWY 19R (CAT II & III)


LOC I-MXK <u>111.5</u>		APCH CRS 190°		Rwy Idg 9318 TDZE 274 Arprt Elev 280		[USAF]	JOINT BASE ANDREWS (ANDREWS AFB) (KADW)					
RADAR or DME required 						ALSF-2 		† MISSED APPROACH: Climbing to 2500, intercept ADW VORTAC R-191 to PREZZ and hold.				
ATIS 133.675 251.05			POTOMAC APP CON 128.0 335.5			TOWER 118.4 349.0		GND CON 121.8 275.8		CLNC DEL 127.55 285.475		CPDLC

CATEGORY II & III ILS-SPECIAL
AIRCREW & AIRCRAFT
CERTIFICATION REQUIRED (IA)

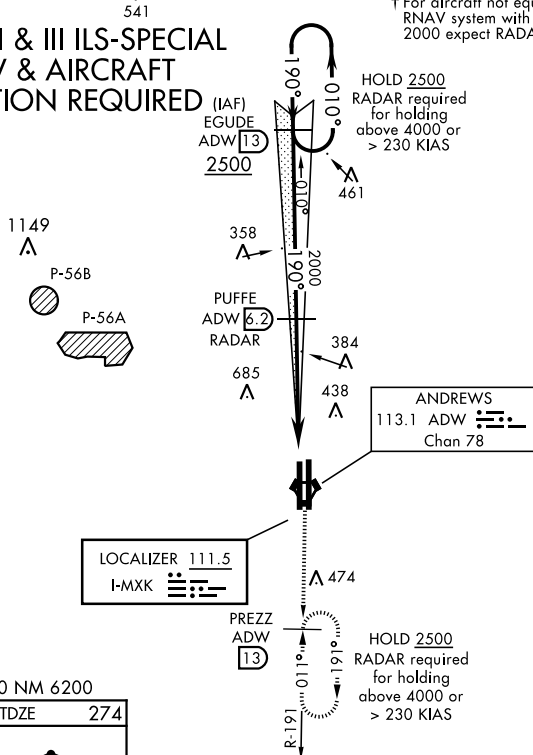

EMERG SAFE ALT 100 NM 6200

ELEV	280		TDZE	274
------	-----	--	------	-----

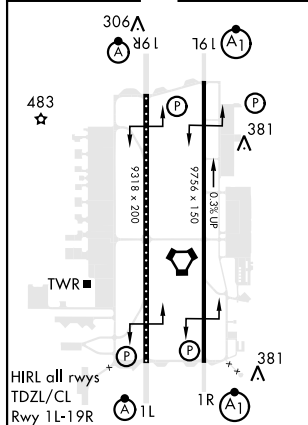

EGUS
ADW 13

PUFFE
ADW 6.2

VGS and ILS glidepath
not coincident
(VGS Angle 3.00/TCR 71).

2500

190°

190°

2500

2000

GS 3.00°
TCR 55

5.2 NM

1099'

ADW VORTAC

CATEGORY	A	B	C	D	E
S-ILS 19R	CAT II	RA 99/12	100	DA 374	
S-ILS 19R		CAT IIIa	RVR 07		
S-ILS 19R		CAT IIIb	RVR 06		
S-ILS 19R		CAT IIIc	NA		

ILS RWY 19R (CAT II & III)