


ILS or LOC RWY 11


LOC I-DJR 109.7	APCH CRS 109°	Rwy Idg 10,002 TDZE 1069 Arpt Elev 1069	[USAF]	DOBBINS ARB (KMGE)	
TACAN or RADAR required.			ALSF-1 	↑ MISSED APPROACH: Climb to 2000 track 109°, then climbing left turn to 3000, intercept the DOB TACAN R-289 to BATLL and hold.	
▼ * When ALS inop, increase RVR to 55 and vis to 1 mile. ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 2 miles.					
ATIS ★ 269.5	ATLANTA APP CON 121.0 268.7	TOWER ★ 120.75 370.875	GND CON 125.3 275.8	ASR	

*** Circling not authorized N of Rwy 11-29 for CAT DE aircraft,
Circling to assault strip not authorized.

† Missed approach requires use of RNAV or ATC RADAR monitoring.

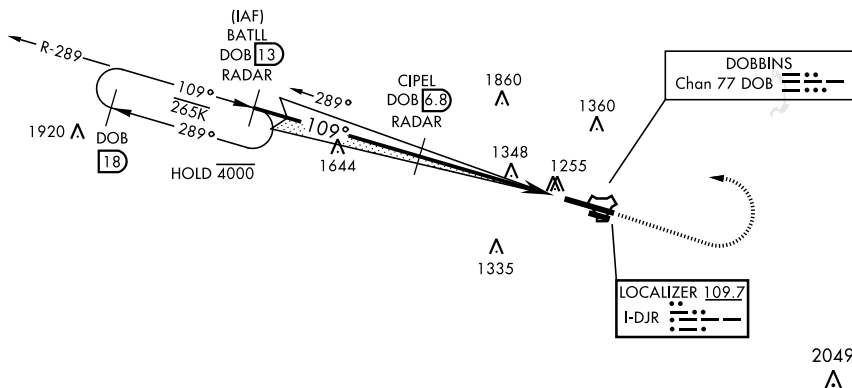

EMERG SAFE ALT 100 NM 7800

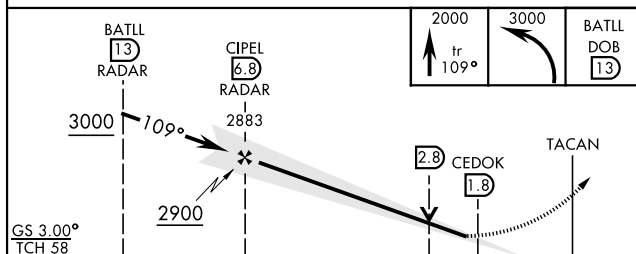

	5 NM				0.5 NM	
CATEGORY	A		B	C	D	E
S-ILS 11 *	1431/40			362	(400-34)	
S-LOC 11 **	1600/40 531 (600-34)		1600/55 531		(600-1)	
CIRCLING ***	1600-1		1620-1		1760-2	
	531 (600-1)	551 (600-1)	691 (700-2)		691 (700-2½)	
	1620-1		1760-2½		1760-2½	
	551 (600-1)		691 (700-2½)		691 (700-2½)	

