

WAAS CH 53443 W29A	APP CRS 290°	Rwy Idg TDZE Apt Elev	5600 212 212
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29

SAN LUIS OBISPO COUNTY RGNL (SBP)


RNP APCH

⚠

Circling to Rwy 25 NA at night. Circling NA north of Rwy 11-29.
Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0° C or above 52° C.

MISSED APPROACH: Climb to 1100 then climbing left turn to 4100 direct WUNUL and hold, continue climb-in-hold to 4100.

ATIS 120.6	SANTA BARBARA APP CON★ 127.725 244.575	SAN LUIS TOWER★ 124.0 (CTAF) 0 379.9	GND CON 121.6	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

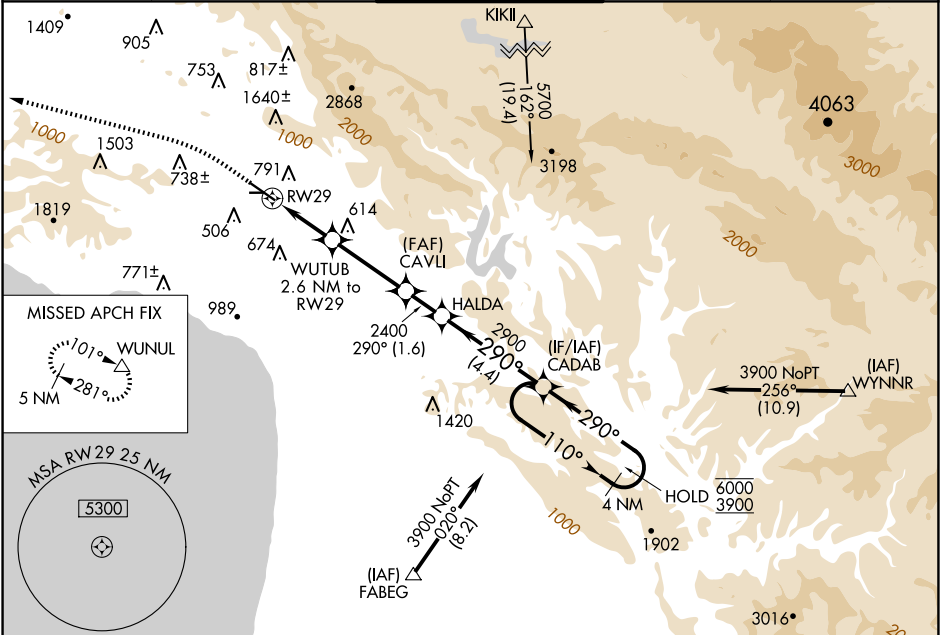

ELEV 212	D	TDZE 212
----------	----------	----------

1100

4100

WUNUL

△

4 NM

Holding Pattern

*LNAV only

AS

C

6101

130

271

1.1% UP

2500 X 100

290°

WUTUB 2.6 NM to RW29	CAVLI 2400	HALDA	CADAB	4 NM
290°	290°	110°	6000 3900	
1220*	2400			GP 3.45° TCH 52
2.6 NM	3.2 NM	1.6 NM	4.4 NM	

CATEGORY	A	B	C	D
LPV DA	831-1¾ 619 (700-1¾)			
LNAV/ VNAV DA	835-1¾ 623 (700-1¾)			
LNAV MDA	1000-1 788 (800-1)	1000-1¼ 788 (800-1¼)	1000-2½ 788 (800-2½)	
C CIRCLING	1000-1 788 (800-1)	1220-1½ 1008 (1100-1½)	1460-3 1248 (1300-3)	1560-3 1348 (1400-3)