

LOC/DME I-ROF
111.15
Chan **48** (Y)

APP CRS
328°

Rwy Idg
TDZE
705
Apt Elev
712


LOC RWY 33

AURORA MUNI (ARR)

For inop ALS, increase S-LOC 33 Cats C and D visibility to 1 3/4 SM and EPABE FIX minimums S-LOC 33 Cats C and D visibility to 1 SM.

MALSR
MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 146° and JOT VOR/DME R-347 to VAINS INT/JOT 13 DME and hold, continue climb-in-hold to 3000.

ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER★ 120.6 (CTAF) 0	GND CON 121.7	CINC DEL 121.7 (When tower closed)	UNICOM 122.95 123.5
-----------------------	---------------------------------------	---	-------------------------	---	-------------------------------

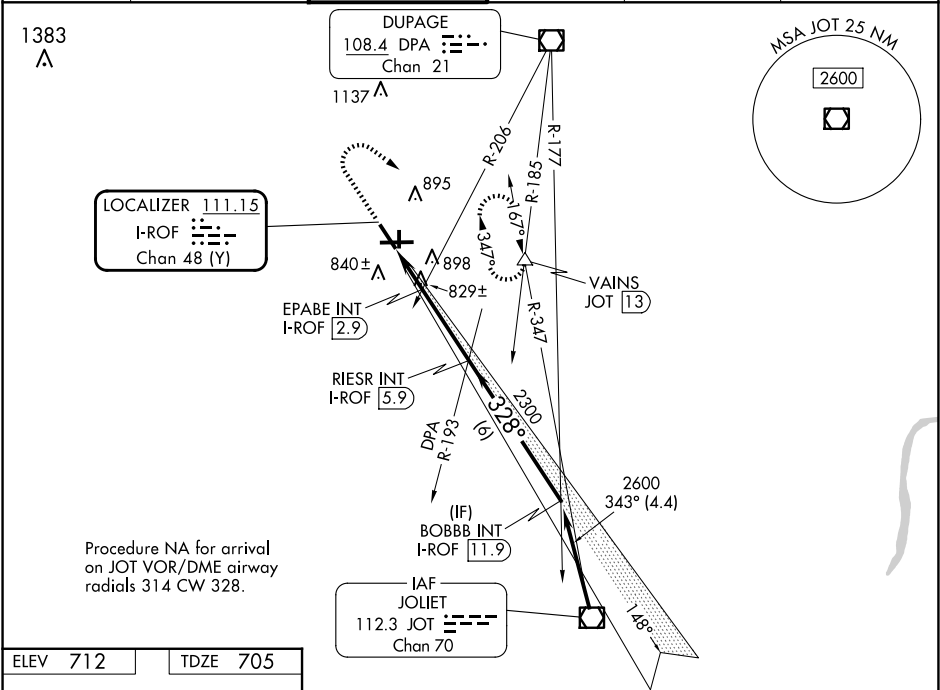

Procedure NA for arrival on JOT VOR/DME airway radials 314 CW 328.

ELEV 712

TDZE 705

HIRL Rwy 15-33 and 9-27

MIRL Rwy 18-36

REIL Rwy 15, 18, 27, and 36

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

1400

↑

3000

hdg

146°

JOT

R-347

VAINS

△

RIESR INT

I-ROF

5.9

BOBBB INT

I-ROF

11.9

EPABE INT

I-ROF

2.9

I-ROF

1.1

I-ROF

2.1

2600

328°

2300

≤ 3.04°

TCH 48

1320

1 NM

0.8 NM

3 NM

6 NM

CATEGORY

A

B

C

D

S-LOC 33

1320-½

615 (700-½)

1320-1⅓

615 (700-1⅓)

CIRCLING

1320-1

608 (700-1)

1320-1¾

608 (700-1¾)

1320-2

608 (700-2)

EPABE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)

S-LOC 33

1080-½

375 (400-½)

1080-⅝

375 (400-⅝)

CIRCLING

1200-1

488 (500-1)

1300-1½

588 (600-1½)

1320-2

608 (700-2)