
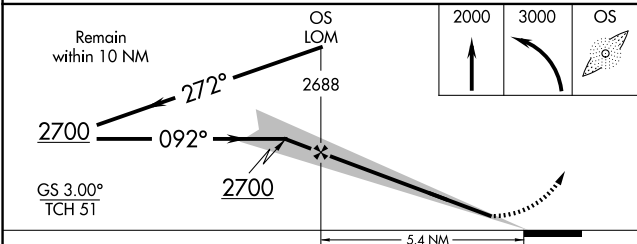


LOC I-OSU 108.5	APP CRS 092°	Rwy Idg TDZE Apt Elev	5004 905 905
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 9R
OHIO STATE UNIVERSITY (OSU)

ADF required for procedure entry. ADF required.				MALSR 		MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct FULER LOM and hold.
▼ ▲ When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting; increase DA to 1140 feet; increase all MDAs 40 feet and S-9R visibility Cat C ½ SM and Cat D and Circling Cat D ¼ SM. Circling Rwy 23 NA at night.						
ATIS 121.35	COLUMBUS APP CON 125.95 317.775	STATE TOWER ★ 118.8 (CTAF) 0 254.325	GND CON 121.7	CLNC DEL 121.7	UNICOM 122.95	

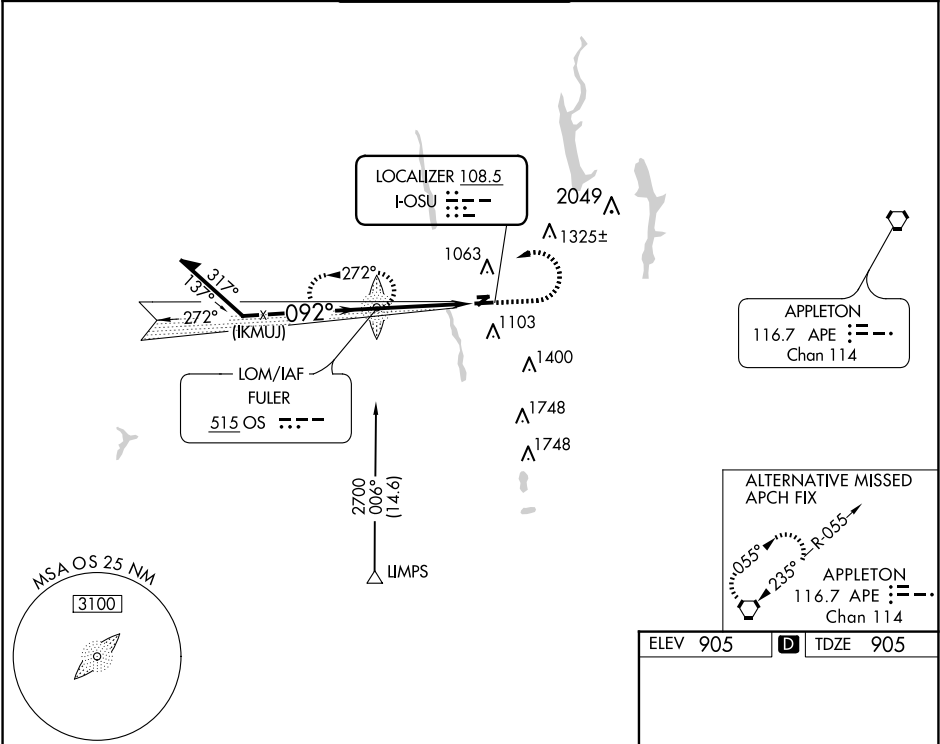

CATEGORY	A	B	C	D
S-ILS 9R	1105-1/2 200 (200-1/2)			
S-LOC 9R	1420-1/2	515 (600-1/2)	1420-1	515 (600-1)
CIRCLING	1420-1	515 (600-1)	1420-1 1/2	1680-2 1/2

ELEV 905	TDZE 905
REIL Rwy 27L HIRL Rwy 9R-27L MIRL Rwy 9L-27R	
FAF to MAP 5.4 NM	
Knots	60 90 120 150 180
Min:Sec	5:24 3:36 2:42 2:10 1:48