

LOC I-AUG 108.7	APP CRS 171°	Rwy Idg TDZE Apt Elev	5002 348 352
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 17
AUGUSTA STATE (AUG)


ADF required.

Localizer unusable from 0.5 NM to threshold above 1500 feet. When local altimeter setting not received, use Waterville altimeter setting: increase S-ILS 17 DA to 583; increase all MDAs 40 feet and visibility S-LOC 17 Cat C and D 1/8 SM, and Circling Cat D 1/4 SM; SHAWE fix minimums increase S-LOC 17 Cat C and D visibility 1/8 SM, and Circling Cat D visibility 1/4 SM. Glideslope unusable below 430 feet. Circling Rwy 8, 26 NA at night. # DME from AUG VOR/DME.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 direct DUNNS LOM and hold.

ASOS 118.325	PORTLAND APP CON ★ 128.35 299.2	CLNC DEL 119.95 299.2	UNICOM 123.0 (CTAF)
------------------------	---	---------------------------------	-------------------------------

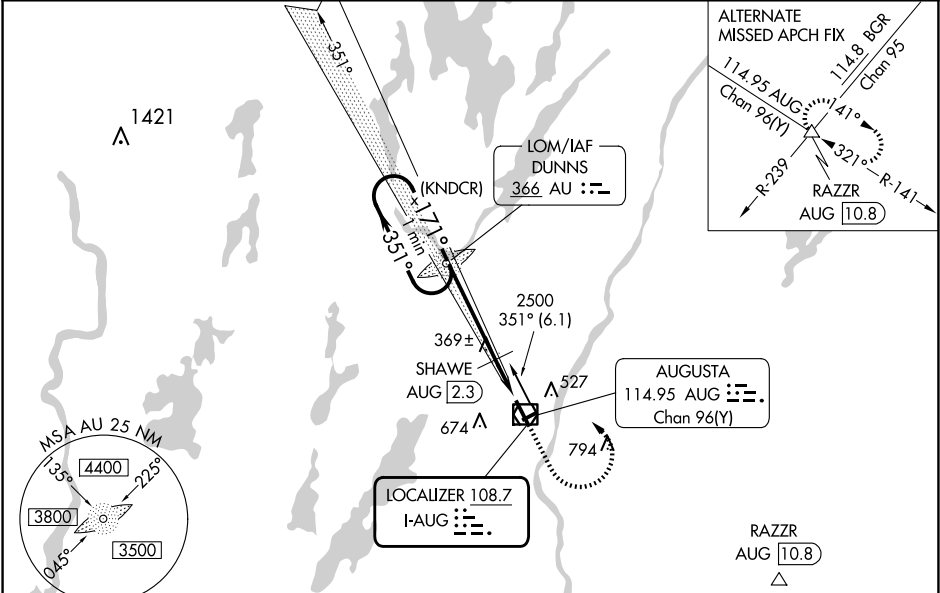

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 53).
One Minute Holding Pattern
AU LOM
2173
2500
351°
171°
GS 3.00° TCH 61
2300
3.9 NM
1.7 NM
SHAWE AUG 2.3
*LOC only, 940 when using Waterville altimeter setting.
*900

ELEV 352	TDZE 348
CATEGORY	
S-ILS 17	
S-LOC 17	
CIRCLING	
SHAWE FIX MINIMUMS #	
S-LOC 17	
CIRCLING	

HIRL Rwy 17-35
MRL Rwy 8-26
REIL Rwy 35

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52