

WAAS CH 90414 W06B	APP CRS 061°	Rwy Ldg TDZE Apt Elev	7001 1009 1009
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6R


JAMES M COX DAYTON INTL (DAY)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 6R helicopter visibility reduction below ¾ SM NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct TARRY and hold.

ATIS 125.8	COLUMBUS APP CON 134.45 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9	CLNC DEL 121.75
---------------	-----------------------------------	-----------------------------	------------------	--------------------

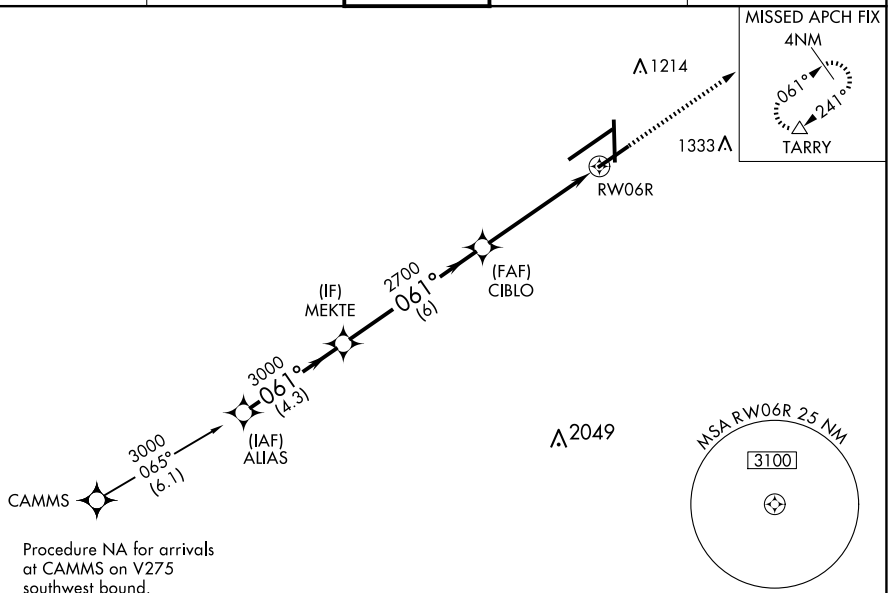

CATEGORY	A	B	C	D
LPV DA	1259-3/4 250 (300-3/4)			
RNAV/VNAV DA	1496-1 3/4 487 (500-1 3/4)			
RNAV MDA	1520-1 511 (600-1)	1520-1 1/2 511 (600-1 1/2)	1520-1 3/4 511 (600-1 3/4)	
C CIRCLING	1580-1 571 (600-1)	1580-1 1/2 571 (600-1 1/2)	1640-2 631 (700-2)	