

WAAS CH 45500 W07A	APP CRS 070°	Rwy Idg TDZE Apt Elev	9810 30 34
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 7L

DAYTONA BEACH INTL (DAB)


Inoperative table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. For inoperative MALSR, increase LNAV/VNAV visibility all Cats to 1¼ and increase LNAV Cats A/B visibility to RVR 5000 and Cats C/D visibility to RVR 6000.

MALSR

MISSED APPROACH:

Climb to 1600 direct GILNE and hold.

ATIS 132.875	DAYTONA APP CON 125.8 269.075	DAYTONA TOWER 120.7 257.8	GND CON 121.9 348.6	CLNC DEL 119.3
------------------------	---	-------------------------------------	-------------------------------	--------------------------

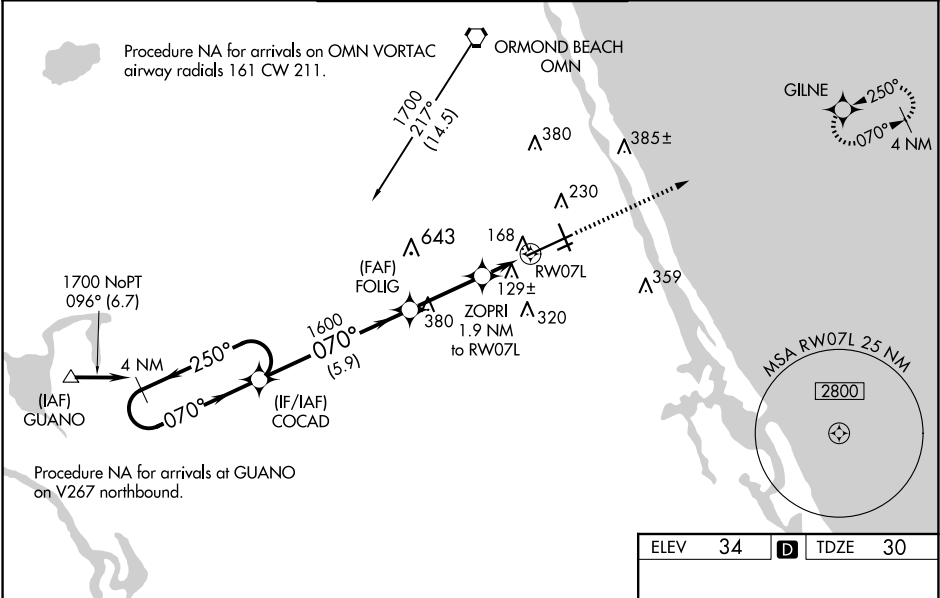

4 NM Holding Pattern 1700 ←250° 070°→ GP 3.00° TCH 58				COCAD FOULG 1600 1600 *680 5.9 NM 2.9 NM 0.8 NM 1.1 NM		1600 GILNE *LNAV only. *1.1 NM to RW07L RW07L	
CATEGORY	A	B	C	D			
LPV DA	230/40		200 (200-¾)				
LNAV/VNAV DA	429/45		399 (400-⅞)				
LNAV MDA	420/40		390 (400-¾)				
CIRCLING	540-1	506 (600-1)	680-1¾ 646 (700-1¾)	700-2 666 (700-2)			

