


WAAS CH 56201 W27B	APP CRS 274°	Rwy Idg TDZE Apt Elev	9482 26 33
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 27L
MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.		MISSED APPROACH: Climb to 2000 direct SUOY and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV			
▲ NA below 2°C or above 54°C.			

ATIS 132.55	ORLANDO APP CON 132.65 281.425	MELBOURNE TOWER ★ 118.2(CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 132.65 (When twr closed)	UNICOM 122.95
-----------------------	--	---	-------------------------	--------------------------	--	-------------------------

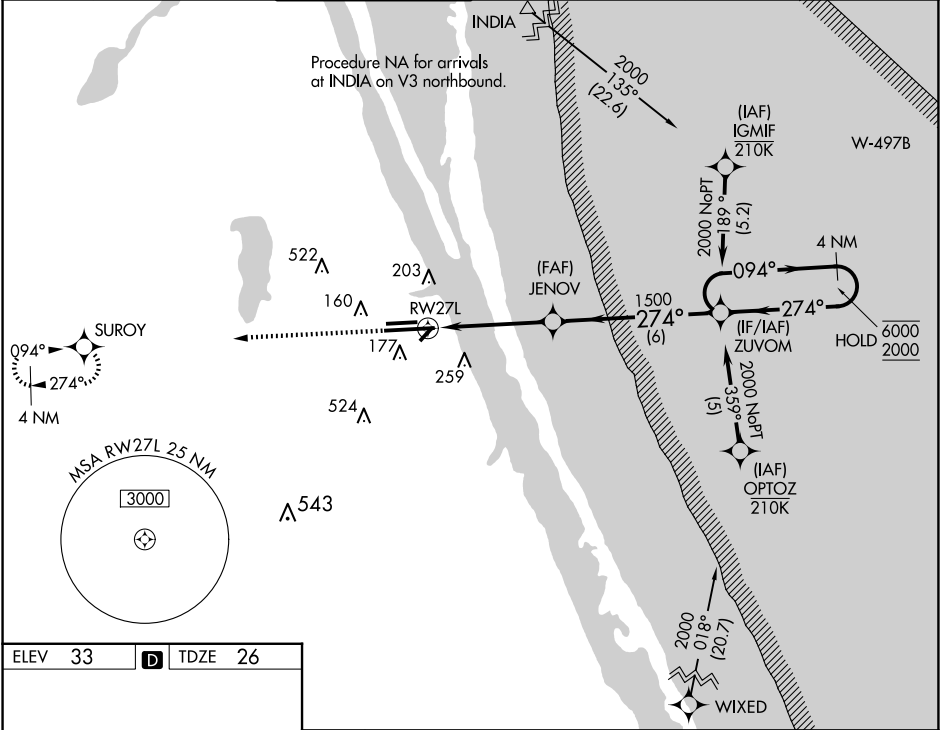

ELEV 33	D	TDZE 26
---------	----------	---------

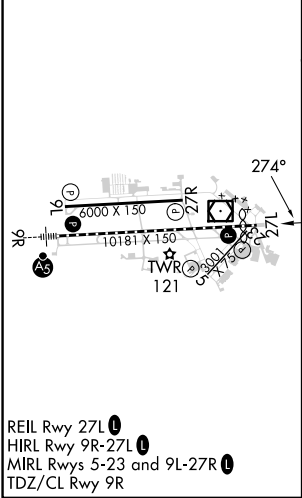

2000

↑

SUROY

✦

JENOV

1500

ZUVOM

4 NM Holding Pattern

1.3 NM to RW27L

1.3 NM

3.2 NM

6 NM

094° → 6000

← 274° 2000

GP 3.00° TCH 52

274°

1500

RW27L

1.3 NM

CATEGORY	A		B	C	D
LPV DA	226-¾		200 (200-¾)		
LNAV/ DA VNAV	318-¾		292 (300-¾)		
LNAV MDA	500-1	474 (500-1)	500-1¾	474 (500-1¾)	
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)	