

|                                        |                        |                                                                  |
|----------------------------------------|------------------------|------------------------------------------------------------------|
| WAAS<br>CH <b>40022</b><br><b>W25A</b> | APP CRS<br><b>258°</b> | Rwy Idg <b>10300</b><br>TDZE <b>1134</b><br>Apt Elev <b>1135</b> |
|----------------------------------------|------------------------|------------------------------------------------------------------|

RNAV (GPS) Y RWY 25R

PHOENIX SKY HARBOR INTL (PHX)


▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 26. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

MISSED APPROACH: Climb to 5000 direct YECXY and via 260° track to BKK VORTAC and hold.

|                          |                                        |                                                                                           |                                                               |                                |       |
|--------------------------|----------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------|--------------------------------|-------|
| D-ATIS<br><b>127.575</b> | PHOENIX APP CON<br><b>128.65 353.9</b> | PHOENIX TOWER<br><b>118.7 278.8</b> (Rwy 8-26)<br><b>120.9 254.3</b> (Rwy 7L-25R, 7R-25L) | GND CON<br><b>119.75 269.2</b> (N)<br><b>132.55 269.2</b> (S) | CLNC DEL<br><b>118.1 269.2</b> | CPDLC |
|--------------------------|----------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------|--------------------------------|-------|

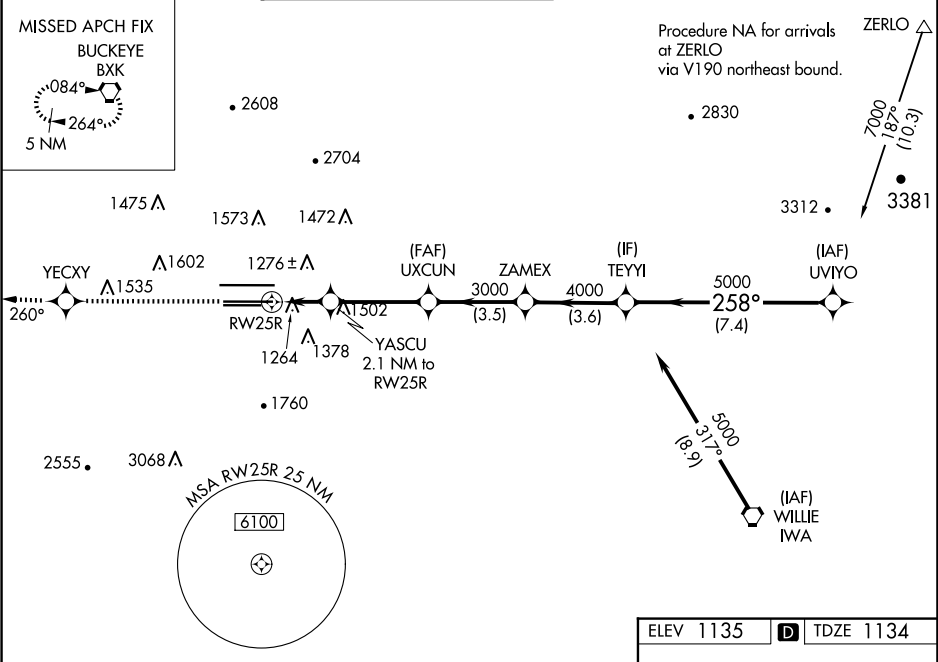
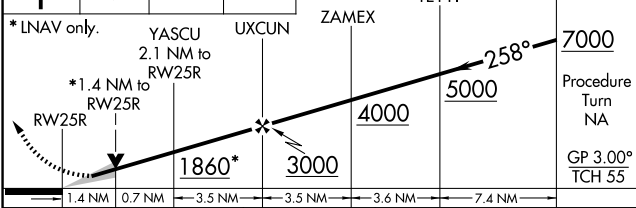
|                                                                                    |                             |            |                          |                                                                     |                         |   |  |
|------------------------------------------------------------------------------------|-----------------------------|------------|--------------------------|---------------------------------------------------------------------|-------------------------|---|--|
| 5000<br>↑                                                                          | YECXY<br>✦                  | tr<br>260° | BXK<br>◻                 | VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.00/TCH 70). |                         |   |  |
| * LNAV only.                                                                       | YASCU<br>2.1 NM to<br>RW25R | UXCUN      | ZAMEX                    | TEYYI                                                               | UVIYO                   |   |  |
|  |                             |            |                          |                                                                     |                         |   |  |
| CATEGORY                                                                           | A                           |            | B                        |                                                                     | C                       | D |  |
| LPV DA                                                                             | 1439-1 305 (400-1)          |            |                          |                                                                     |                         |   |  |
| LNAV/<br>VNAV DA                                                                   | 1580-1½ 446 (500-1½)        |            |                          |                                                                     |                         |   |  |
| LNAV MDA                                                                           | 1640-1 506 (600-1)          |            | 1640-1½ 506 (600-1½)     |                                                                     |                         |   |  |
| CIRCLING                                                                           | 1740-1 605 (700-1)          |            | 2040-2¾<br>905 (1000-2¾) |                                                                     | 2560-3<br>1425 (1500-3) |   |  |

