

|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-BDL | APP CRS | Rwy Idg  | 9509 |
| 111.1         | 058°    | TDZE     | 173  |
| Chan 48       |         | Apt Elev | 173  |

ILS or LOC RWY 6


BRADLEY INTL (BDL)

RADAR required for procedure entry.

ALSF-2

MISSED APPROACH: Climb to 4000 then left turn direct BAF VORTAC and hold.

|        |                                                       |               |             |              |       |
|--------|-------------------------------------------------------|---------------|-------------|--------------|-------|
| D-ATIS | BRADLEY APP CON                                       | BRADLEY TOWER | GND CON     | CLNC DEL     | CPDLC |
| 118.15 | 123.95 290.55 (061°-240°)<br>125.35 281.5 (241°-060°) | 120.3 351.8   | 121.9 348.6 | 121.75 322.3 |       |

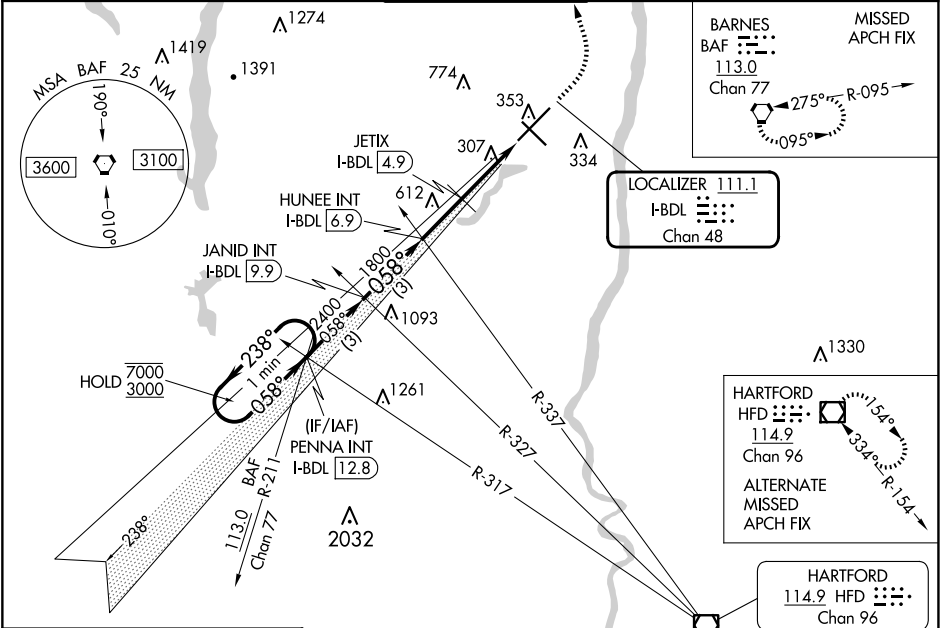

ELEV 173

TDZE 173

TDZ/CL Rwy 6 and 24

HIRL Rwys 6-24 and 15-33

REIL Rwys 6 and 15

FAF to MAP 4.9 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 4:54 | 3:16 | 2:27 | 1:58 | 1:38 |

|                                                                 |                         |                         |         |               |
|-----------------------------------------------------------------|-------------------------|-------------------------|---------|---------------|
| VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71). |                         |                         |         |               |
| One Minute Holding Pattern                                      |                         |                         |         |               |
| PENNA INT I-BDL 12.8                                            |                         |                         |         |               |
| JANID INT I-BDL 9.9                                             |                         |                         |         |               |
| HUNEE INT I-BDL 6.9                                             |                         |                         |         |               |
| JETIX I-BDL 4.9                                                 |                         |                         |         |               |
| I-BDL 2.9                                                       |                         |                         |         |               |
| I-BDL 1.9                                                       |                         |                         |         |               |
| GS 3.00° TCH 54                                                 |                         |                         |         |               |
| 3 NM 3 NM 2 NM 2 NM 1 NM                                        |                         |                         |         |               |
| CATEGORY                                                        | A                       | B                       | C       | D             |
| S-ILS 6                                                         | 373/18 200 (200-½)      |                         |         |               |
| S-LOC 6                                                         | 1160/40<br>987 (1000-¾) | 1160/55<br>987 (1000-1) | 1160-2½ | 987 (1000-2½) |
| JETIX FIX MINIMUMS (DME REQUIRED)                               |                         |                         |         |               |
| S-LOC 6                                                         | 560/24                  | 387 (400-½)             | 560/35  | 387 (400-⅝)   |