

APP CRS

234°

Rwy Idg

7500

TDZE

435

Apt Elev

435

RNAV (RNP) Z RWY 23L

RALEIGH-DURHAM INTL (RDU)

RNP AR APCH-GPS.


▼

For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Simultaneous approach authorized, except for arrivals at KENCH. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 direct ZEBUL and hold.

D-ATIS 123.8	RALEIGH APP CON 127.675 307.9	RALEIGH TOWER 127.45 257.8	GND CON 121.9 348.6	CLNC DEL 120.1	CPDLC
-----------------	----------------------------------	-------------------------------	------------------------	-------------------	-------

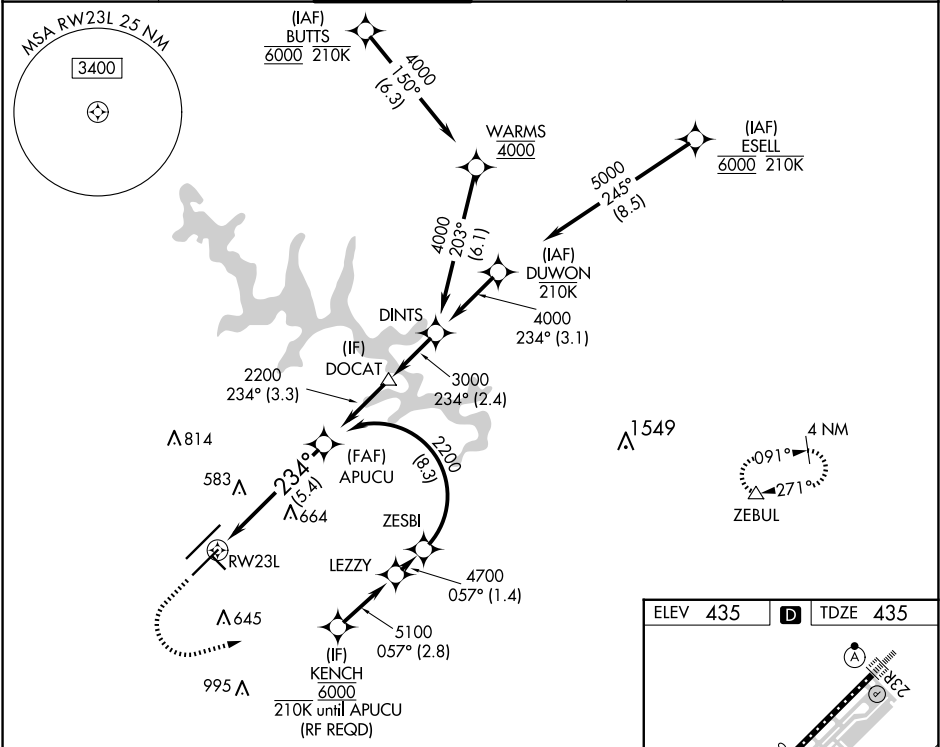

1100

2600

ZEBUL

See planview for multiple IF locations.

APUCU 2200

RW23L

234°

2200

GP 3.00°

TCH 56

CATEGORY

A

B

C

D

RNP 0.10 DA	776/30	341 (400-%)	
RNP 0.30 DA	826/35	391 (400-%)	
AUTHORIZATION REQUIRED			

REIL Rwy 32

MIRL Rwy 14-32

HIRL Rwy 5R-23L and 5L-23R

TDZ/CL Rwy 5L, 23L, and 23R