

WAAS CH 45613 W23A	APP CRS 234°	Rwy Idg 10000 TDZE 409 Apt Elev 435
--	------------------------	--

RNAV (GPS) Y RWY 23R

RALEIGH-DURHAM INTL (RDU)



RNP APCH - GPS

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
Use of FD or AP providing RNAV track guidance required during simultaneous operations.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat C/D visibility to 1½ NM.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing right turn to 2200 direct DUHAM and hold.

D-ATIS 123.8	RALEIGH APP CON 127.675 307.9	RALEIGH TOWER 127.45 257.8	GND CON 121.9 348.6	CINC DEL 120.1	CPDLC
------------------------	---	--------------------------------------	-------------------------------	--------------------------	-------

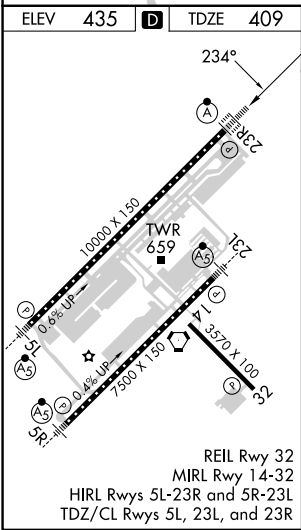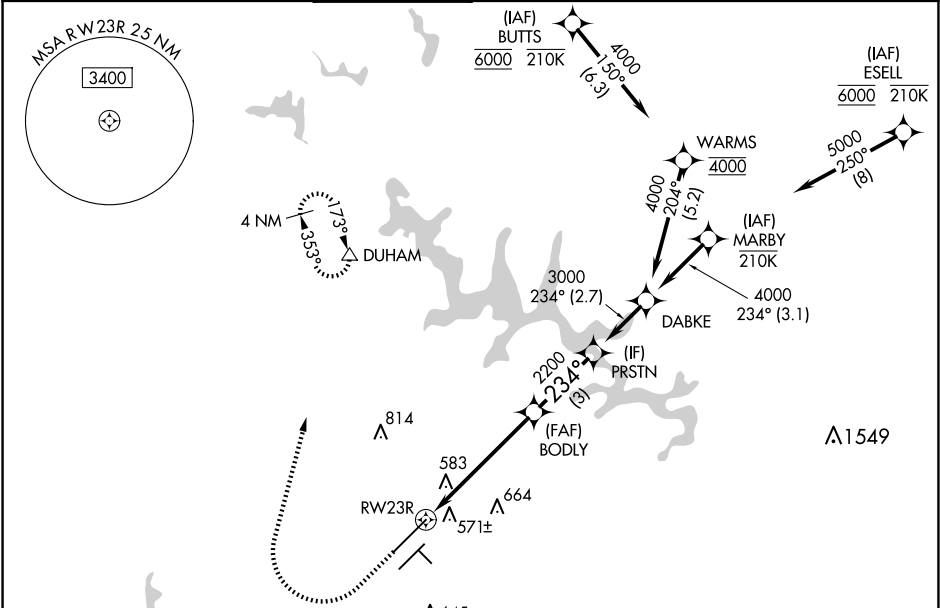

ELEV 435 TDZE 409		1000 2200 DUHAM		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).	
				GP 3.00° TCH 55	
CATEGORY	A	B	C	D	
LPV DA	609/18		200 (200-½)		
LNAV/VNAV DA	826/40		417 (400-¾)		
LNAV MDA	980/24		571 (600-½)		980-1¼ 571 (600-1¼)
CIRCLING	980-1		545 (600-1)		1020-1½ 585 (600-1½) 1180-2½ 745 (800-2½)