

APP CRS	Rwy Idg	8400
224°	TDZE	12
	Apt Elev	13

RNAV (RNP) Z RWY 22L

JOHN F KENNEDY INTL (JFK)

RF required. RNP AR APCH.

T For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 54°C (130°F). Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 5500, increase RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2



MISSED APPROACH: Climb to 3000 on track 224° to WEPLA and on track 177° to CHANT and hold.

D-ATIS		
(ARR/DEP) (ARR-NE) (ARR-SW)		
128.725	117.7	115.4


NEW YORK APP COM
128.125 269.0

KENNEDY TOWER		
Rwys 4R/22L and 13L/31R	119.1	281.55
Rwys 4L/22R and 13R/31L	123.9	281.55

GND CO	121.9	348.6
--------	-------	-------

CLNC DEL	135.05
	348.6


CPDLC	
-------	--

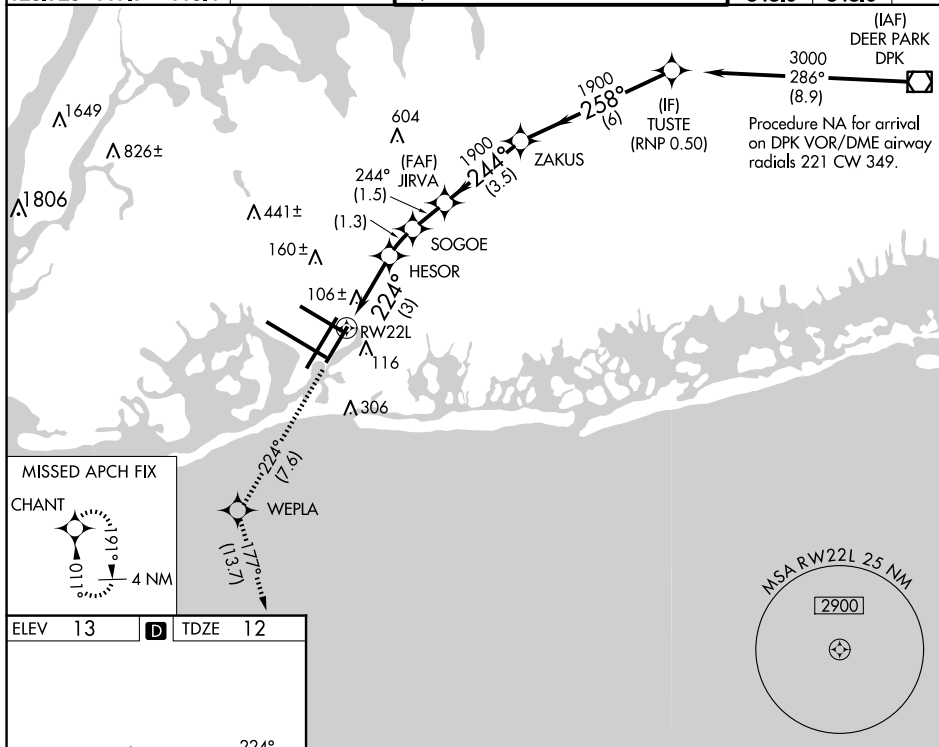

ELEV	13	D	TDZE	12
------	----	----------	------	----

D

12



RLS Rwy 13L and 13R
HIRL all Rwy
TDZ/CL Rwy 4L, 4R, 13L, 22L and 31R

3000 ↑ tr 224°	WEPLA ✦	CHANT ✦	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00°/TCH 66).	
CATEGORY	A	B	C	D
RNP 0.20 DA		361/40	349 (400-3/4)	
RNP 0.30 DA		421/40	409 (500-3/4)	
AUTHORIZATION REQUIRED				

NEW YORK, NEW YORK

Amdt 1C 19JUL18

40°38'N-73°47'W

JOHN F KENNEDY INTL (JFK)

RNAV (RNP) Z RWY 22L