

APP CRS
314°

Rwy Idg
8486

TDZE
12

Apt Elev
13

RNAV (RNP) Z RWY 31R

JOHN F KENNEDY INTL (JFK)


RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 1800 then climbing left turn to 4000 direct COL VOR/DME and hold.

D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW)	NEW YORK APP CON	KENNEDY TOWER Rwys 4R/22L and 13L/31R Rwys 4L/22R and 13R/31L	GND CON	CLNC DEL	CPDLC
128.725 117.7 115.4	128.125 269.0	119.1 281.55 123.9 281.55	121.9 348.6	135.05 348.6	

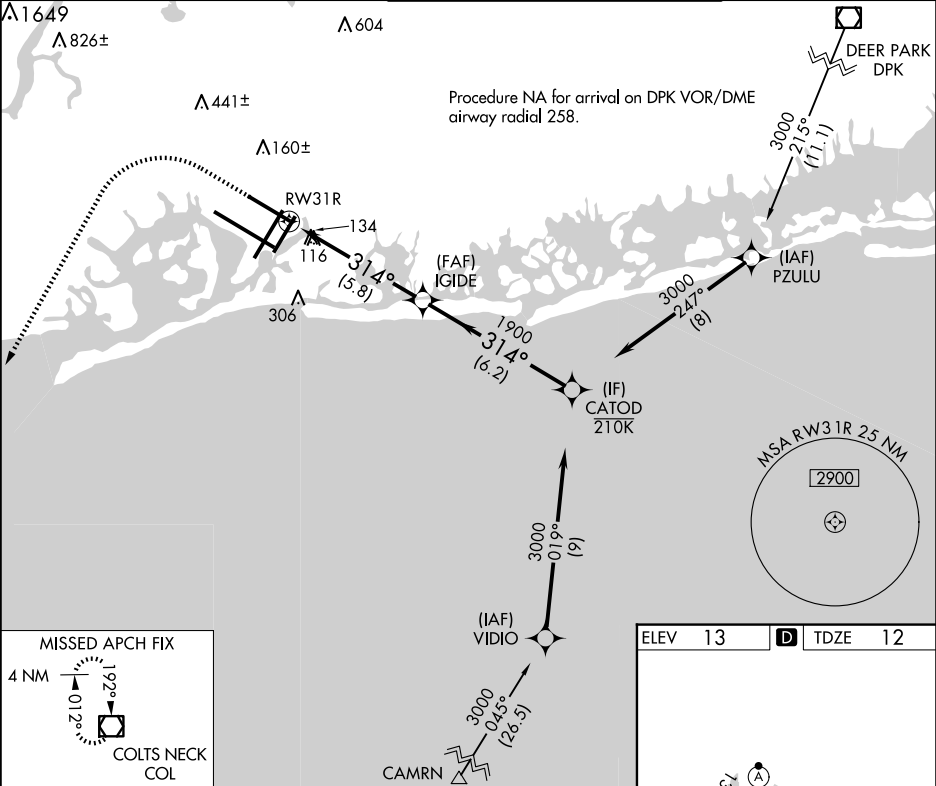

1800

4000

COL

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 54).

RW31R

IGIDE

1900

314°

3000

CATOD

GP 3.00°

TCH 49

5.8 NM

6.2 NM

CATEGORY	A	B	C	D
RNP 0.30 DA		458/50	446 (500-1)	

AUTHORIZATION REQUIRED

RLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R