

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>61110</b><br><b>W32A</b> | APP CRS<br><b>319°</b> | Rwy Idg <b>8101</b><br>TDZE <b>750</b><br>Apt Elev <b>755</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 32R  
UNIVERSITY OF ILLINOIS/WILLARD (CMI)



**ASR** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19° C (-2° F) or above 54° C (130° F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Rantoul altimeter setting. When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet, all MDA 60 feet; increase LNAV Cat C/D visibility to RVR 5500. For inoperative MALSR, when using local or Rantoul altimeter setting, increase LNAV Cat C/D visibility to 1½ miles.

MALSR



**MISSED APPROACH:**  
Climb to 2800 direct  
HIPUB and on track  
287° to LODGE  
and hold.

|                       |                                                                                              |                                                  |                         |                           |                         |
|-----------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>124.85</b> | CHAMPAIGN APP CON ★<br><b>121.35 285.65</b> (319°-138°)<br><b>132.85 290.225</b> (139°-318°) | CHAMPAIGN TOWER ★<br><b>120.4 (CTAF) 0 229.4</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>128.75</b> | UNICOM<br><b>122.95</b> |
|-----------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------|---------------------------|-------------------------|

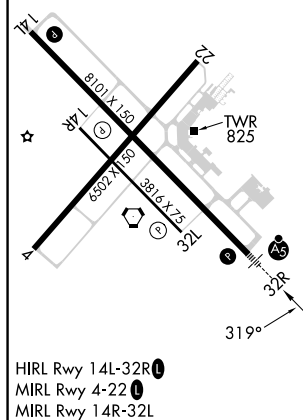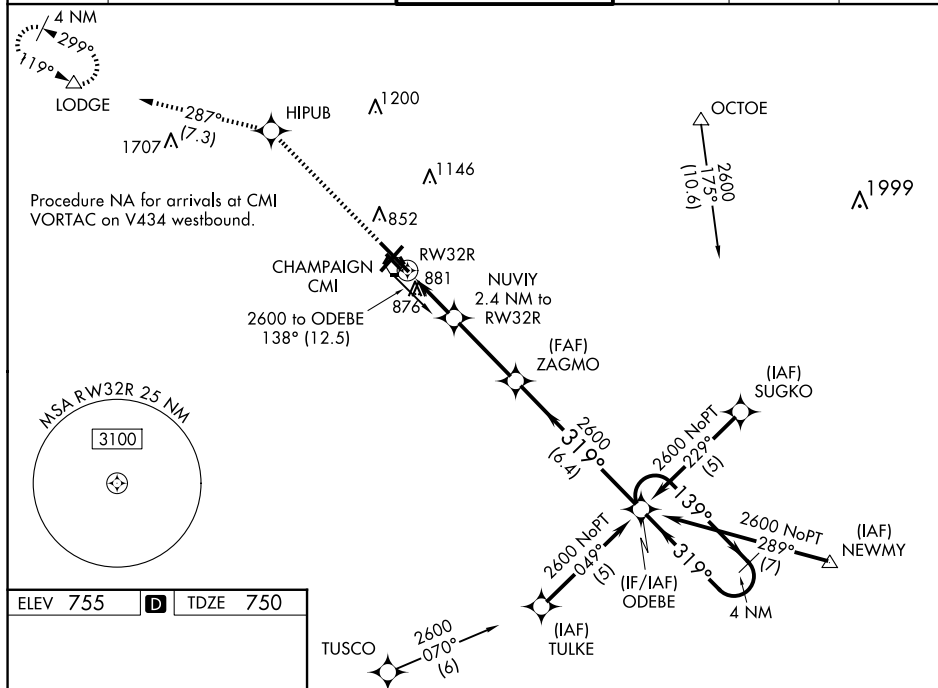

The diagram illustrates the ZAGMO VORTAC navigation aid. Key features include:

- Navigation Aids:** ZAGMO (VORTAC) at 2600 MHz, ODEBE (VORTAC) at 2600 MHz, and NUVIY (VORTAC) at 1560 MHz.
- Holding Patterns:** A 4 NM Holding Pattern is shown around ODEBE.
- Distances:** Distances from ZAGMO are marked as 1.4 NM, 3.2 NM, and 6.4 NM.
- Angles:** Angles of 139° and 319° are indicated for the holding pattern.
- GP 3.00° TCH 52:** Ground Proximity (GP) 3.00 degrees, Threshold Crossing Height (TCH) 52 feet.