

WAAS

CH **97300**

**W04A**

APP CRS

**037°**

Rwy Ldg

**7200**

TDZE

**4205**

Apt Elev

**4216**

RNAV (GPS) RWY 4

CLOVIS RGNL (CVN)

RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 49°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM. Circling NA to Rwy 8 and 26.

MALSR

AS

MISSED APPROACH: Climb to 6000 direct RIMKE and hold.

AWOS-3PT

**135.375**

CANNON APP CON


**118.425 352.1**

CLNC DEL

**119.0**

UNICOM

**122.8 (CTAF) 0**

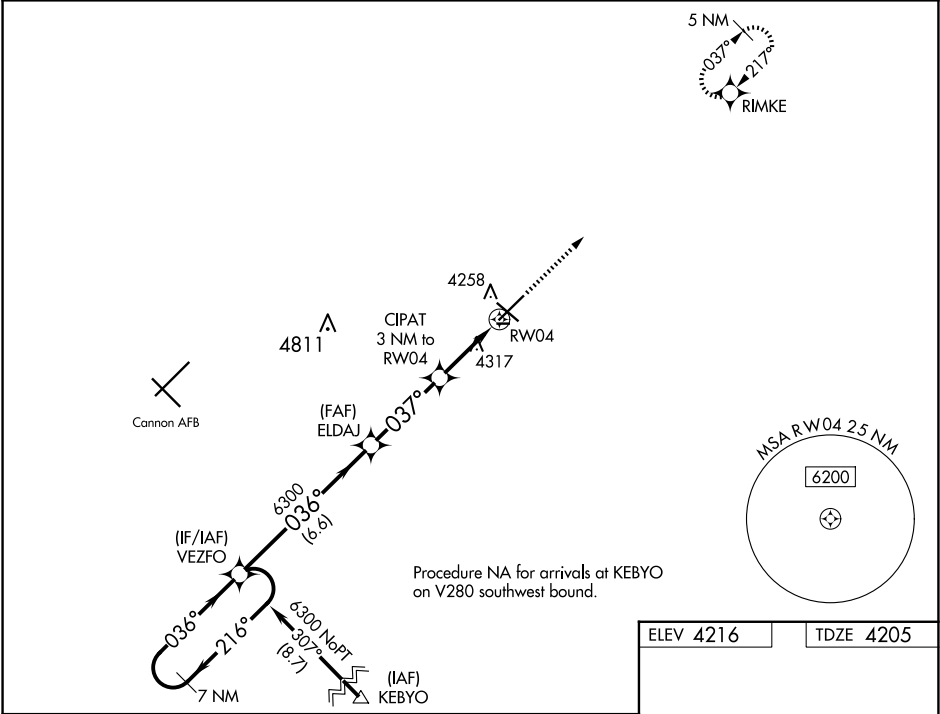

7 NM Holding Pattern

VEZFO

ELDAJ

CIPAT 3 NM to RW04

1.2 NM to RW04

RW04

6000

RIMKE

GP 3.00° TCH 53

6300

6300

5200

6.6 NM

3.4 NM

1.8 NM

1.2

| CATEGORY     | A      | B           | C                       | D                     |
|--------------|--------|-------------|-------------------------|-----------------------|
| LPV DA       |        | 4405-½      | 200 (200-½)             |                       |
| LNAV/VNAV DA |        | 4455-½      | 250 (300-½)             |                       |
| LNAV MDA     | 4640-½ | 435 (500-½) | 4640-¾                  | 435 (500-¾)           |
| CIRCLING     | 4680-1 | 464 (500-1) | 4700-1½<br>484 (500-1½) | 4820-2<br>604 (700-2) |

ELEV 4216

TDZE 4205

REIL Rwy 12 and 30 0

MIRL Rwy 4-22 and 12-30 0