


RNAV (GPS) RWY 14

STATESBORO-BULLOCH COUNTY (TBR)



▼ Circling to Rwy 6/24 NA at night. Baro-VNAV and VDP NA when using Sylvania altimeter setting.
▲ Rwy 14 helicopter visibility reduction below ¼ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Sylvania altimeter setting and increase LPV DA to 525 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 547 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 2600 direct
HENUT and hold.

UNICOM
122.725 (CTAF) **L**

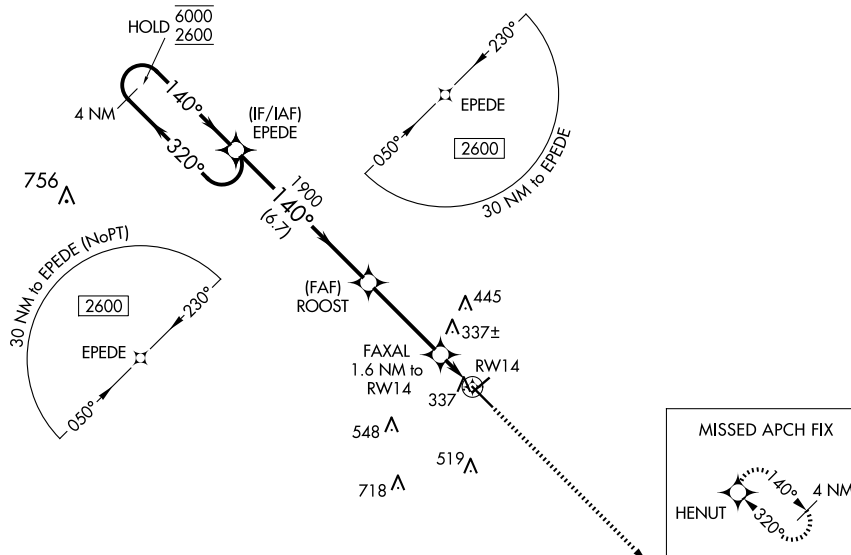

VGSI and RNAV glidepath not coincident
(VGSI Angle 4.00/TCH 42).

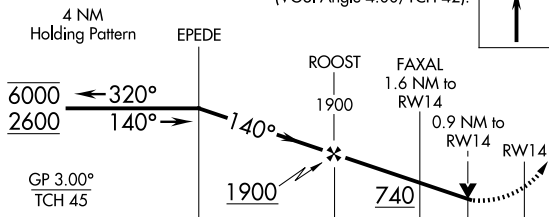

CATEGORY		A		B		C		D	
LPV	DA	496-7 ⁸ / ₈				315 (400-7 ⁸ / ₈)			
LNAV/ VNAV	DA	518-1				337 (400-1)			
LNAV	MDA	600-1 419 (500-1)				600-1 ¹ / ₈ 419 (500-1 ¹ / ₈)			
C CIRCLING		640-1 453 (500-1)		740-1 553 (600-1)		840-1 ³ / ₄ 653 (700-1 ³ / ₄)		860-2 ¹ / ₄ 673 (700-2 ¹ / ₄)	

