




LOC I-MQJ 108.7	APP CRS 252°	Rwy Idg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 25

INDIANAPOLIS RGNL (MQJ)

▼ ▲ NA When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility ½ mile and Circling Cat D visibility ¼ mile.	MALSR AS	MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.
--	--	--

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF) 0
----------------------------	---	---------------------------	--

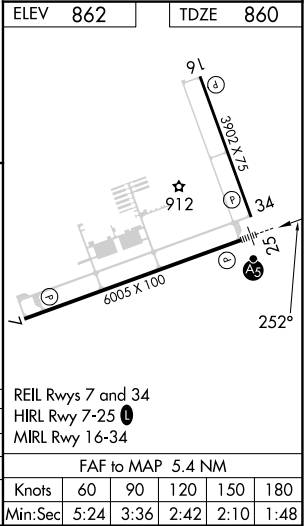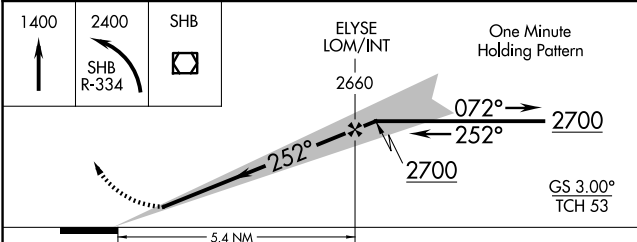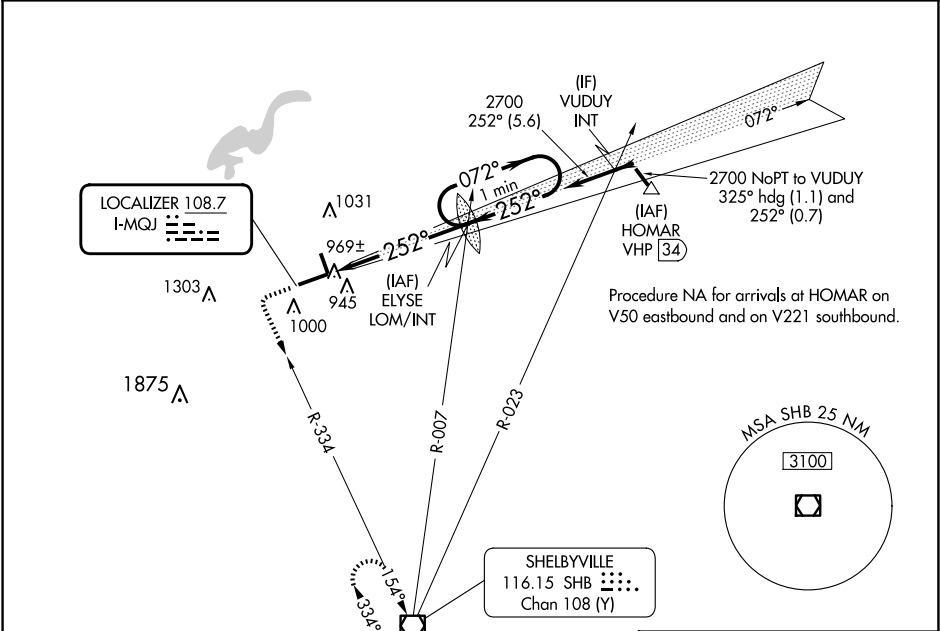

CATEGORY	A	B	C	D
S-ILS 25	1060-½ 200 (200-½)			
S-LOC 25	1220-½	360 (400-½)	1220-⅝	360 (400-⅝)
◉ CIRCLING	1340-1	478 (500-1)	1360-1½	1660-2½
			498 (500-1½)	798 (800-2½)

REIL Rwy 7 and 34	
HIRL Rwy 7-25	0
MIRL Rwy 16-34	
FAF to MAP 5.4 NM	
Knots	60 90 120 150 180
Min:Sec	5:24 3:36 2:42 2:10 1:48