

APP CRS	Rwy Ldg	5001
088°	TDZE	1389
	Apt Elev	1395

RNAV (GPS) RWY 9


RAMONA (RNM)

⚠

Circling NA north of Rwy 9-27. Circling NA for Cat C when using Gillespie Fld altimeter setting. DME/DME RNP -0.3 NA. LNAV minima NA when using Gillespie Fld altimeter setting. When local altimeter setting not received, use Gillespie Fld altimeter setting and increase all Circling MDA 180 feet and increase Circling visibility Cat B ¼ SM. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing left turn to 5000 direct ROBNN and hold.

ATIS 132.025	SOCAL APP CON 132.2 269.1	RAMONA TOWER ★ 119,875 (CTAF) 0	GND CON 121.65	UNICOM 122.95
-----------------	------------------------------	------------------------------------	-------------------	------------------

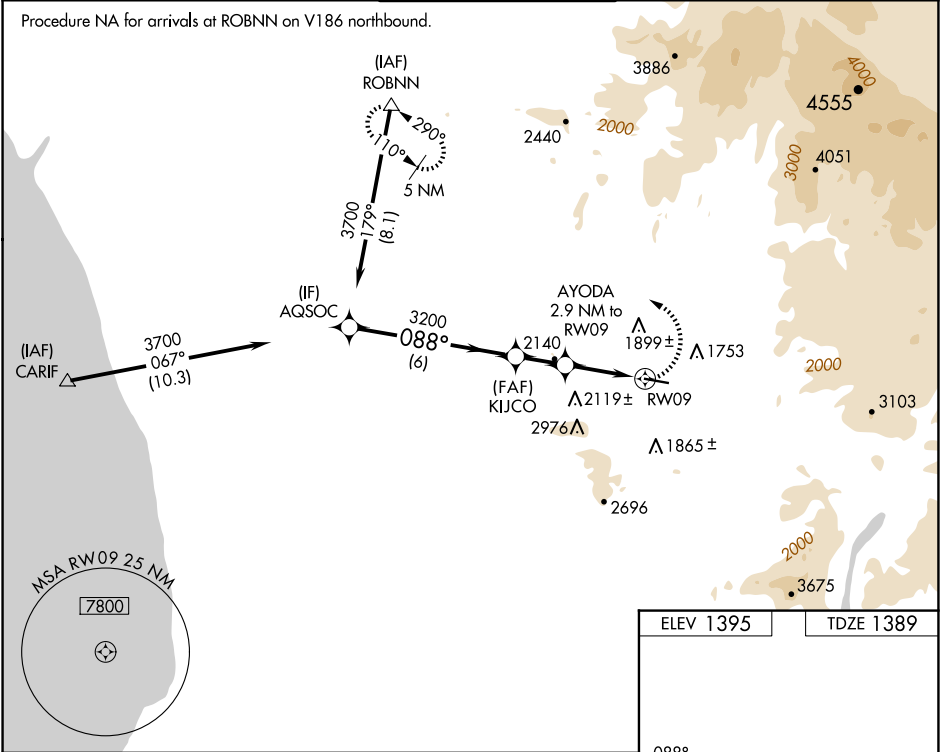

* 2700 when using Gillespie Fld altimeter setting.				
Procedure Turn NA AQSOC KIJCO AYODA RW09 3700 3200 *2520 5000 088° 3.54° 2.2 NM 6 NM 1.8 NM 0.7 NM 2.2 NM				
CATEGORY	A	B	C	D
LNAV MDA	2240-1 851 (900-1)	2240-1¼ 851 (900-1¼)	2240-2½ 851 (900-2½)	NA
CIRCLING	2240-1¼	845 (900-1¼)	3180-3 1785 (1800-3)	NA