


RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.		MALSR AS	MISSED APPROACH: Climb to 2800 direct JOTER and hold.
AWOS-3 133.975	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.8 (CTAF) 0	

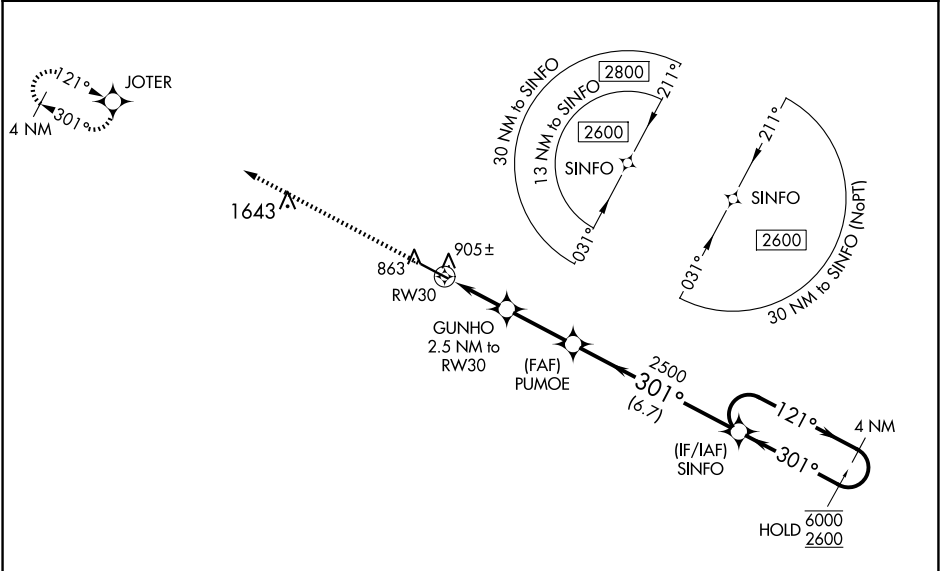

ELEV 798

D

TDZE 796