

WAAS CH 65835 W31A	APP CRS 312°	Rwy Ldg TDZE 812 Apt Elev 827
--	------------------------	---

RNAV (GPS) RWY 31

ROSECRANS MEML (STJ)

▼


▲

ASR/PAR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Kansas City Intl altimeter setting. Straight-In minimums NA at night. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV visibility 1⁄8 mile and LNAV/VNAV visibility 3⁄8 mile all Cats; increase all MDA 100 feet and LNAV Cat C and D visibility 1⁄4 mile, and Circling Cat C 1⁄2 mile, Cat D 1⁄4 mile.

MISSED APPROACH:
Climb to 3100 direct
OVEGE and hold.

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9 (CTAF) 0239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

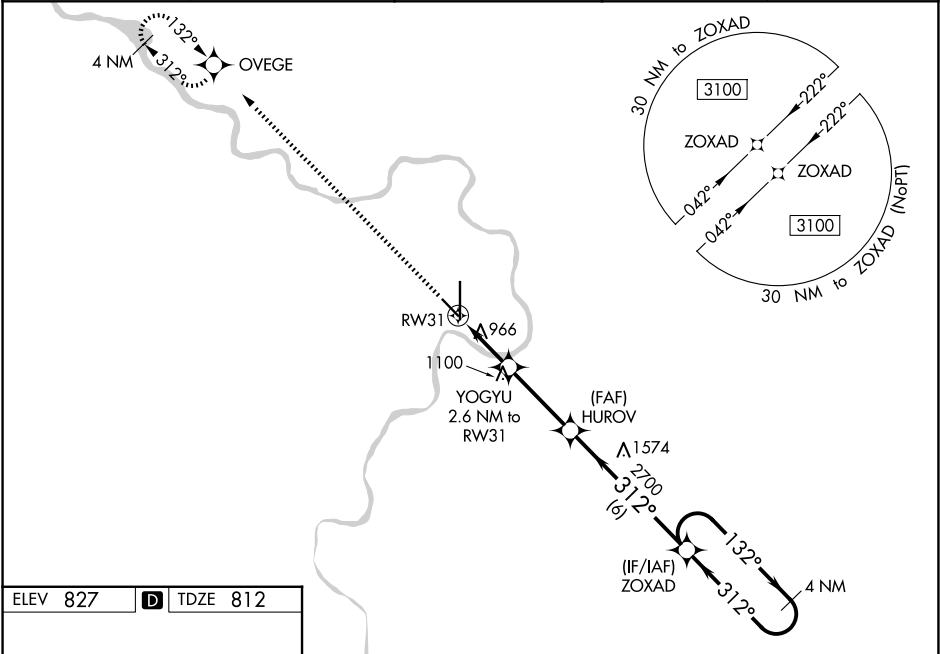

ELEV 827	D	TDZE 812
-----------------	----------	-----------------

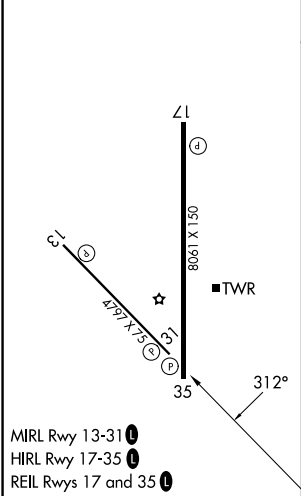

	OVEGE	YOGYU	HUROV	ZOXAD	4 NM Holding Pattern
	3100	1100	1574	2700	3100
	*LNAV only.	*1.1 NM to RW31			
		1700*	2700	312°	132°
		1.1 NM	1.5 NM	3.2 NM	6 NM
CATEGORY	A	B	C	D	
LPV DA	1062-1 250 (300-1)				
LNAV/VNAV DA	1255-1½ 443 (500-1½)				
LNAV MDA	1220-1 408 (400-1)		1220-1½ 408 (400-1½)		
CIRCLING	1400-1 573 (600-1)	1420-1 593 (600-1)	1620-2¼ 793 (800-2¼)	1640-2¾ 813 (900-2¾)	

NC-3, 30 OCT 2025 to 27 NOV 2025

NC-3, 30 OCT 2025 to 27 NOV 2025