

WAAS CH 87104 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev	5004 418 418
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

PERRY-HOUSTON COUNTY (PXE)

RNP APCH-GPS.


▼


▲

Baro-VNAV and VDP NA when using Middle Georgia Rgnl altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
When local altimeter setting not received, use Middle Georgia Rgnl altimeter setting and increase LPV DA to 656 feet; increase LNAV/VNAV DA to 857 feet and all visibilities ½ SM. Increase all MDAs 40 feet; and Circling visibility Cat A and D ¼ SM.

MISSED APPROACH: Climb to 2300 direct SCTRY and hold.

AWOS-3 123.825	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------------------

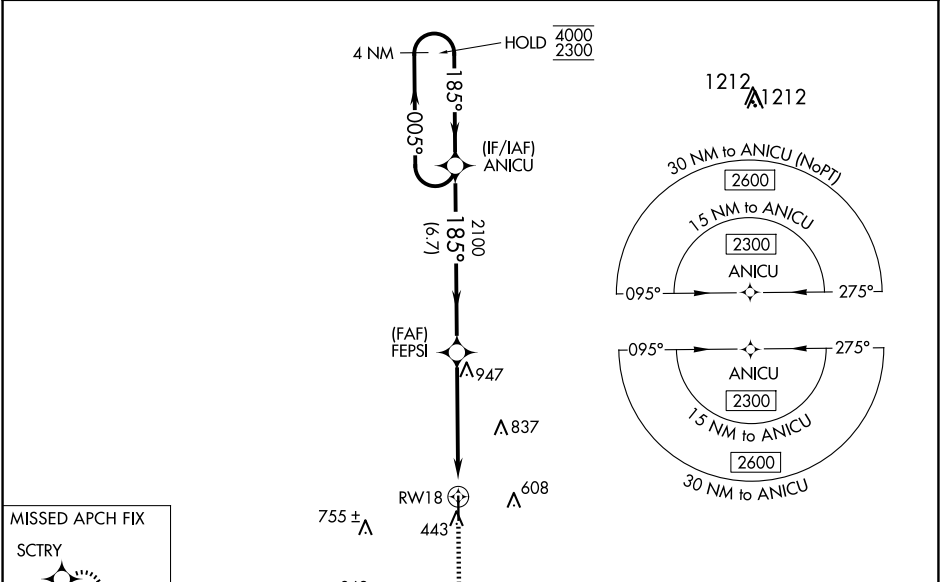

		ELEV 418		TDZE 418	
4 NM Holding Pattern		ANICU		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).	
4000 2300		FEPSI		2300 SCTRY	
GP 3.00° TCH 40		2100		2.4 NM to RW18	
185°		185°		RW18	
6.7 NM		2.8 NM		2.4 NM	
CATEGORY	A	B	C	D	
LPV DA	618-3/4 200 (200-3/4)				
LNAV/ VNAV DA	819-1 1/8 401 (500-1 1/8)				
LNAV MDA	1200-1 782 (800-1)	1200-1 1/4 782 (800-1 1/4)	1200-2 1/2 782 (800-2 1/2)	782 (800-2 1/2)	
CIRCLING	1200-1 782 (800-1)	1200-1 1/4 782 (800-1 1/4)	1200-2 1/2 782 (800-2 1/2)	1280-2 3/4 862 (900-2 3/4)	
HIRL Rwy 18-36 0					

ELEV 418		TDZE 418	
185°		81	
5004 X 100		36	
P		A5	