

APP CRS	Rwy Ldg	10000
139°	TDZE	442
	Apt Elev	459

RNAV (RNP) Z RWY 14L

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP AR APCH - GPS. Authorization required. From RECLA, COSET: RF.

▼


▲ NA

ASR

For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5000.

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct DUTMY and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
---------------------	---------------------------------	-----------------------------	------------------------

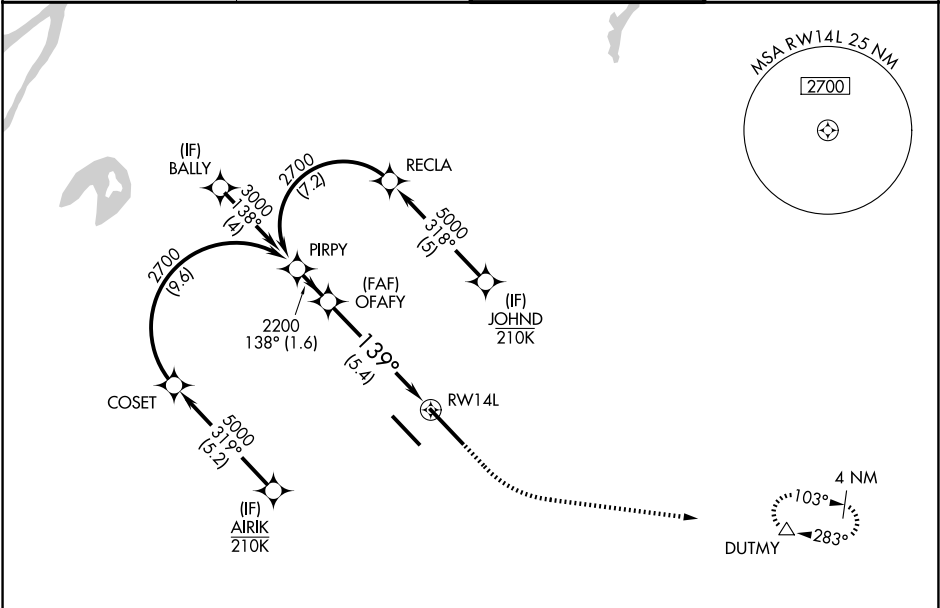

ELEV 459

D

TDZE 442

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

2000

3000

DUTMY

See planview for multiple IF locations.

PIRPY

OFAFY

GP 3.00°

TCH 55

2700

2200

138°

139°

RWY 14L

1.6 NM

5.4 NM

CATEGORY	A	B	C	D
RNP 0.15 DA		773/40	331 (400-¾)	
RNP 0.30 DA		867/40	425 (500-¾)	

AUTHORIZATION REQUIRED

REIL Rwy 14L
HIRL Rwys 14R-32L and 14L-32R