
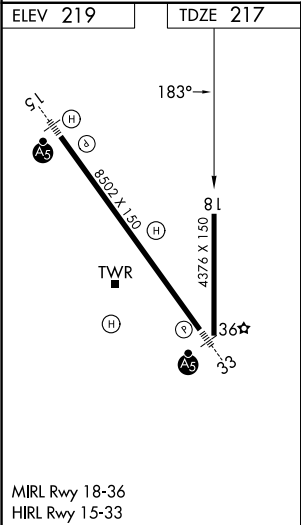


WAAS CH 78128 W18A	APP CRS 183°	Rwy Ldg TDZE 217 Apt Elev 219
--	------------------------	---

RNAV (GPS) RWY 18
MOBILE RGNL (MOB)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct IPAPE and hold.
ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 42°C. Rwy 18 helicopter visibility reduction below ¾ SM NA.	

ATIS 124.75 257.85	MOBILE APP CON ★ 118.5 269.3	MOBILE TOWER ★ 118.3 (CTAF) 0 239.0	GND CON 121.9 348.6	UNICOM 122.95
------------------------------	--	---	-------------------------------	-------------------------

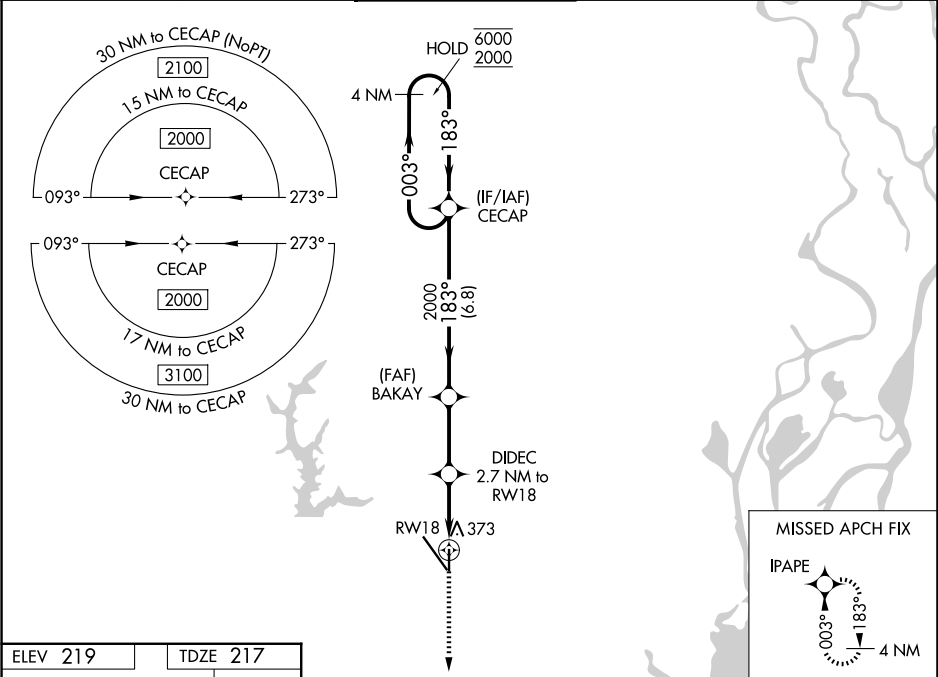

	4 NM Holding Pattern	CECAP	BAKAY	DIDECE 2.7 NM to RWY 18	1.3 NM to RWY 18	RWY 18
	6000 2000	183°	2000	1120		
	GP 3.00° TCH 45	6.8 NM	2.8 NM	1.4 NM	1.3	
CATEGORY	A	B	C	D		
LPV DA	508-1	291 (300-1)				
LNAV/VNAV DA	624-1 3/8	407 (500-1 3/8)				
LNAV MDA	640-1	423 (500-1)	640-1 1/4	423 (500-1 1/4)		
CIRCLING	680-1	461 (500-1)	740-1 1/2 521 (600-1 1/2)	780-2 561 (600-2)		

SE-4, 27 NOV 2025 to 25 DEC 2025

SE-4, 27 NOV 2025 to 25 DEC 2025