

WAAS CH 40022 W25A	APP CRS 258°	Rwy Ldg 10300 TDZE 1134 Apt Elev 1135
--	------------------------	--


RNAV (GPS) Y RWY 25R
PHOENIX SKY HARBOR INTL (PHX)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 26. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.




MISSED APPROACH: Climb to 5000
direct YECXY and via 260° track to
BXK VORTAC and hold.

D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (8-26) 120.9 254.3 (7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)
--------------------------	--	---	---

MISSED APCH FIX



Procedure NA for arrivals
at ZERLO
via V190 northeast bound

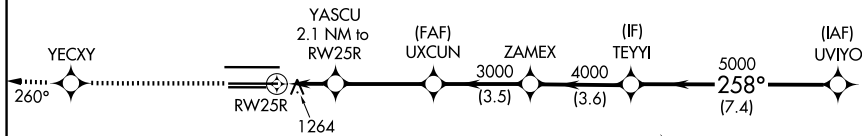

5000 ↑	YECCY ✦	tr 260°	BXK ◡	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 70).				
* LNAV only.				YASCU 2.1 NM to RW25R	UXCUN	ZAMEX	TEYYI	UVIYO
 1.4 NM 0.7 NM 3.5 NM 3.5 NM 3.6 NM 7.4 NM				1860* 3000 4000 5000 7000 258° Procedure Turn NA GP 3.00° TCH 55				
CATEGORY		A		B		C		D
LPV	DA	1439-1 305 (400-1)						
LNAV/ VNAV	DA	1580-1½ 446 (500-1½)						
LNAV MDA		1640-1 506 (600-1)			1640-1½ 506 (600-1½)			
CIRCLING		1740-1 605 (700-1)		2040-2¾ 905 (1000-2¾)		2560-3 1425 (1500-3)		

