
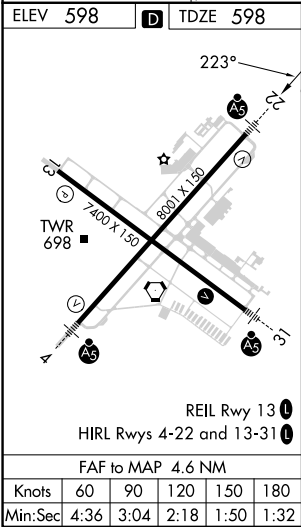


|           |         |          |      |
|-----------|---------|----------|------|
| LOC I-LQY | APP CRS | Rwy Ldg  | 8001 |
| 111.7     | 223°    | TDZE     | 598  |
|           |         | Apt Elev | 598  |

ILS or LOC RWY 22  
ABRAHAM LINCOLN CAPITAL (SPI)

|                                                                                                                                                                                                                                                        |  |       |                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------|---------------------------------------------------------------------------------------------------------------------------------------|
| ADF or RADAR required for procedure entry. DME required.                                                                                                                                                                                               |  | MALSR | MISSED APPROACH: Climb to 1500 then climbing right turn to 2700 on heading 250° and on SPI VORTAC R-235 to CUBVO/SPI 12 DME and hold. |
| VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase S-ILS 22 DA to 856 feet; increase all MDAs 60 feet and S-LOC 22 visibility Cat C/D ¼ SM, and Circling Cat C/D visibility ¼ SM. |  | ASR   |                                                                                                                                       |

|              |                       |                      |             |        |
|--------------|-----------------------|----------------------|-------------|--------|
| ATIS         | SAINT LOUIS APP CON * | SPRINGFIELD TOWER *  | GND CON     | UNICOM |
| 127.65 270.1 | 126.15 323.0          | 121.3 (CTAF) 0 257.8 | 121.9 348.6 | 122.95 |

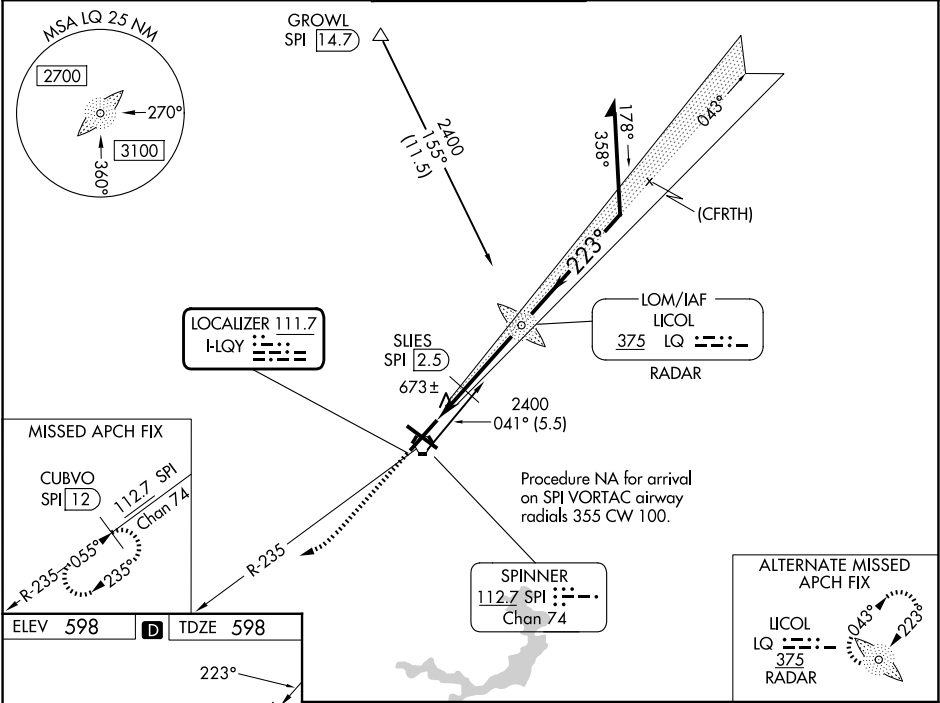

|          |                       |                       |                         |                              |                     |
|----------|-----------------------|-----------------------|-------------------------|------------------------------|---------------------|
| 1500     | 2700                  | SPI R-235             | CUBVO SPI 12            | LQ LOM<br>LICOL<br>RADAR     | Remain within 10 NM |
| ↑        | hdg 250°              |                       |                         | 2119<br>043°<br>223°<br>2400 | GS 3.00°<br>TCH 54  |
| 1.5 NM   |                       | 3.1 NM                |                         |                              |                     |
| CATEGORY | A                     | B                     | C                       | D                            |                     |
| S-ILS 22 | 798-½ 200 (200-½)     |                       |                         |                              |                     |
| S-LOC 22 | 980-½ 382 (400-½)     |                       | 980-⅝ 382 (400-⅝)       |                              |                     |
| CIRCLING | 1040-1<br>442 (500-1) | 1100-1<br>502 (600-1) | 1360-2¼<br>762 (800-2¼) | 1380-2½<br>782 (800-2½)      |                     |